
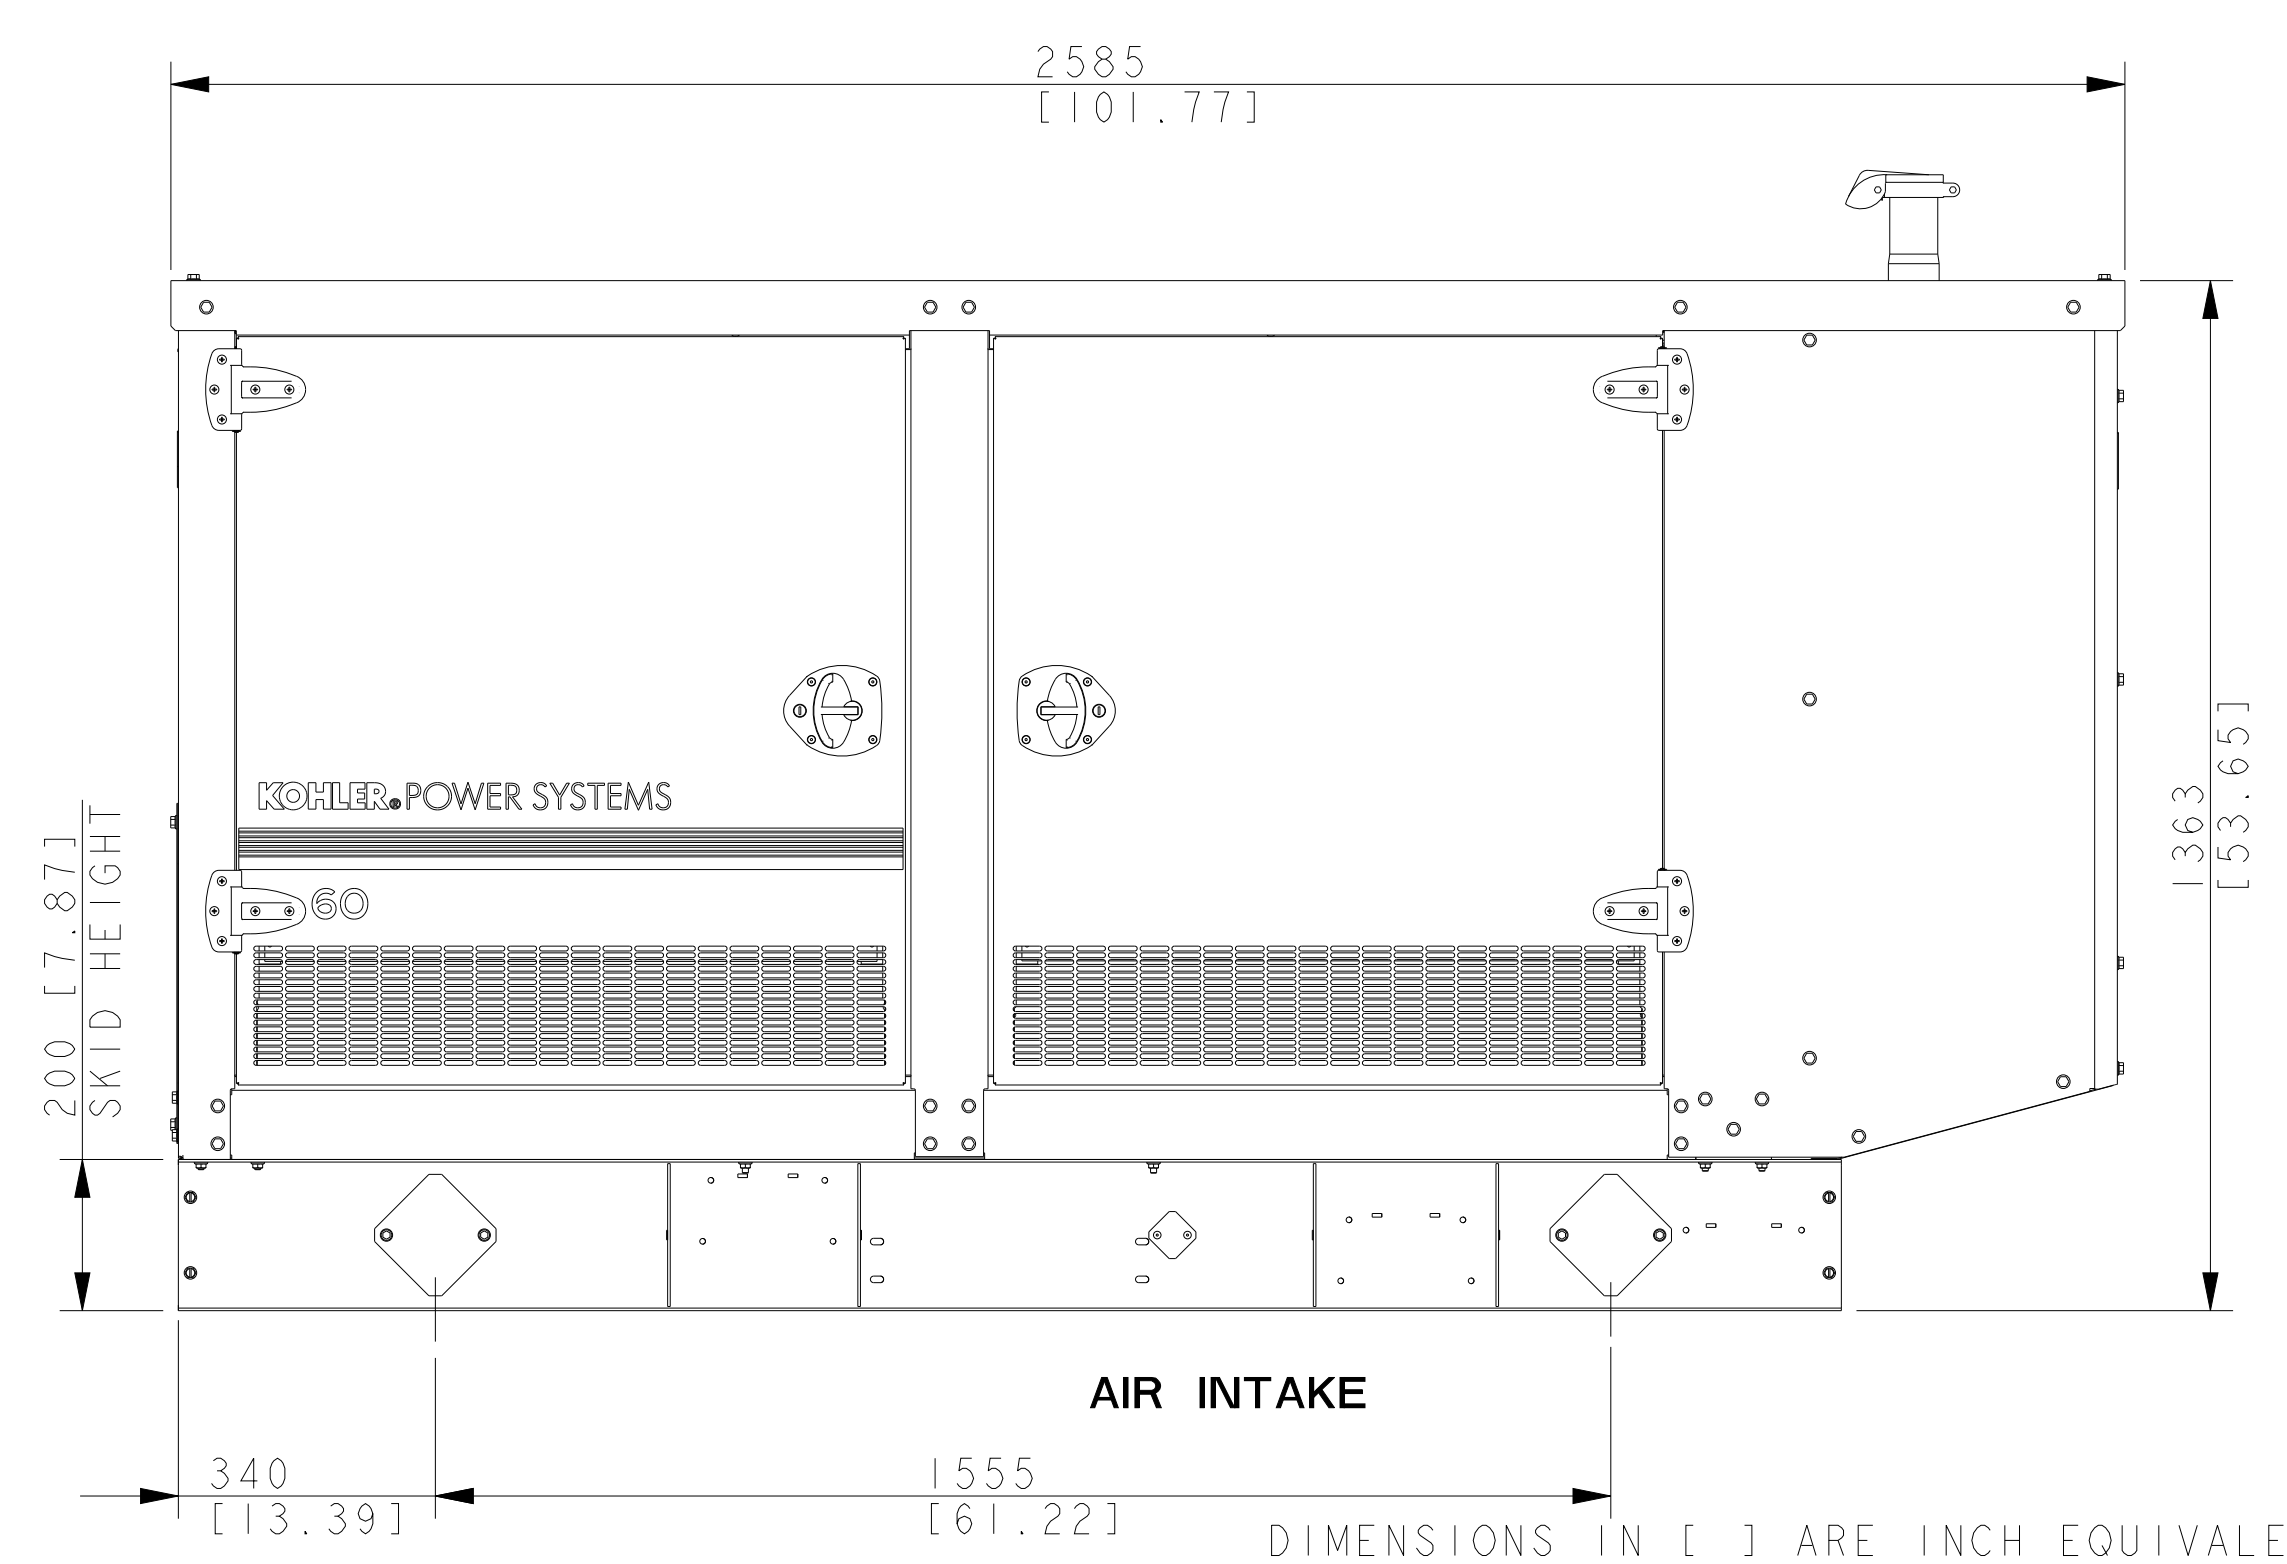
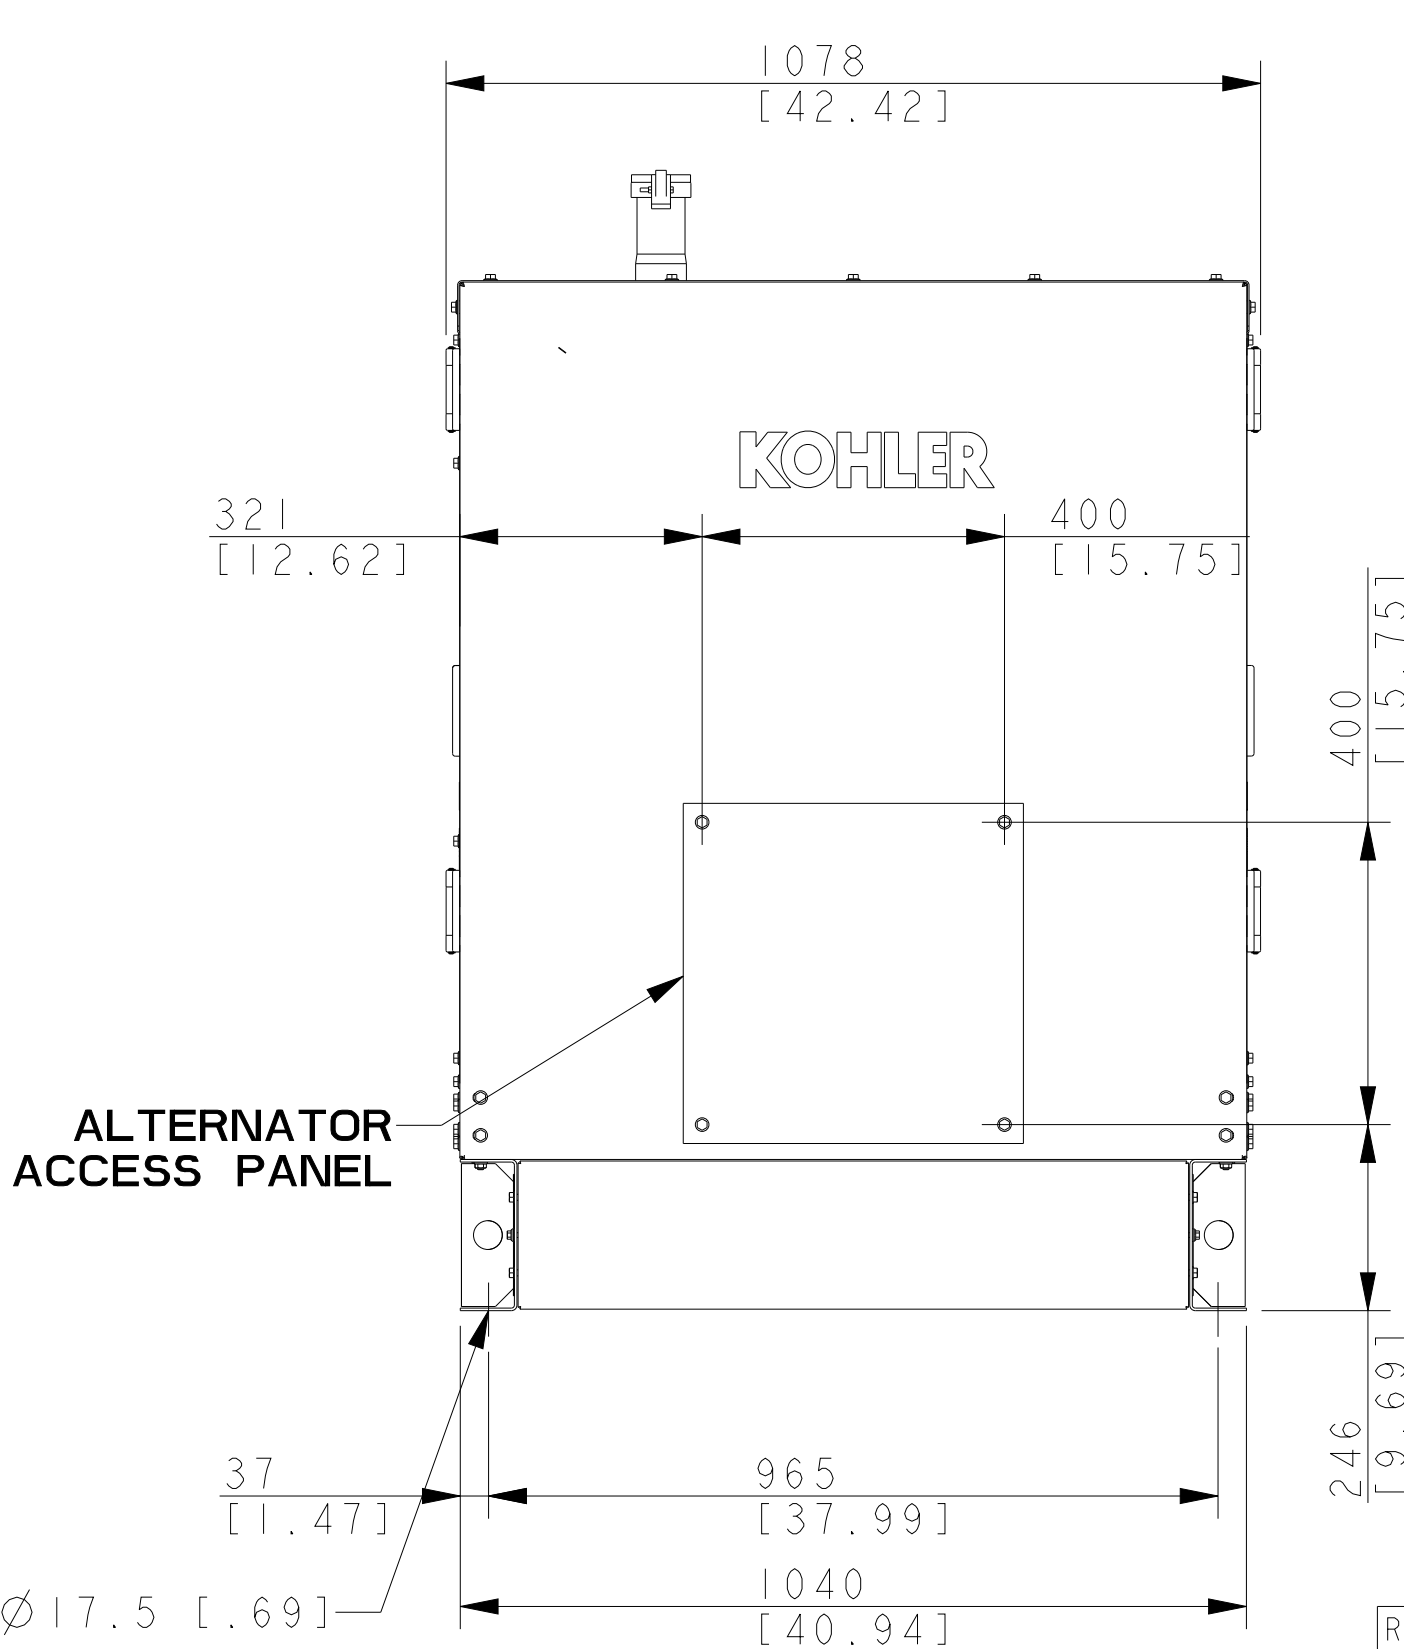


MODEL	GENSET WEIGHT (WET) WITH ENCLOSURE		ENCLOSURE ONLY	MODEL	GENSET WEIGHT (WET) WITH ENCLOSURE		ENCLOSURE ONLY
	STEEL WEATHER	ALUMINUM SOUND			STEEL WEATHER	ALUMINUM SOUND	
25kW 4P4/4Q4	855 Kg [1885 LBS]	768 Kg [1693 LBS]	239 Kg [527 LBS]	50KW 4P8 60kW 4Q8	1099 Kg [2423 LBS]	1012 Kg [2231 LBS]	239 Kg [527 LBS]
	860 Kg [1896 LBS]	791 Kg [1744 LBS]	244 Kg [538 LBS]		1104 Kg [2434 LBS]	1113 Kg [2454 LBS]	244 Kg [538 LBS]
	878 Kg [1936 LBS]	832 Kg [1834 LBS]	239 Kg [527 LBS]		1200 Kg [2646 LBS]	1055 Kg [2326 LBS]	239 Kg [527 LBS]
30kW 4P5/4Q5	883 Kg [1947 LBS]	849 Kg [1872 LBS]	244 Kg [538 LBS]	60KW 4S7/4V7	1205 Kg [2657 LBS]	1253 Kg [2762 LBS]	244 Kg [538 LBS]
	919 Kg [2026 LBS]	977 Kg [2154 LBS]	239 Kg [527 LBS]		1205 Kg [2657 LBS]	1253 Kg [2762 LBS]	244 Kg [538 LBS]
	924 Kg [2037 LBS]	1002 Kg [2209 LBS]	244 Kg [538 LBS]		1113 Kg [2454 LBS]	1142 Kg [2518 LBS]	239 Kg [527 LBS]
30kW 4P7/4Q7	924 Kg [2037 LBS]	1040 Kg [2293 LBS]	244 Kg [538 LBS]	60KW 4P10/4Q10	1147 Kg [2529 LBS]	1166 Kg [2571 LBS]	244 Kg [538 LBS]
	832 Kg [1834 LBS]	1045 Kg [2304 LBS]	239 Kg [527 LBS]		1147 Kg [2529 LBS]	1166 Kg [2571 LBS]	244 Kg [538 LBS]
	832 Kg [1834 LBS]	1079 Kg [2379 LBS]	239 Kg [527 LBS]		1055 Kg [2326 LBS]	1055 Kg [2326 LBS]	152 Kg [335 LBS]
40kW 4P5/4Q5	936 Kg [2064 LBS]	1079 Kg [2379 LBS]	239 Kg [527 LBS]	60KW 4S9/4V9	1253 Kg [2762 LBS]	1258 Kg [2773 LBS]	239 Kg [527 LBS]
	941 Kg [2075 LBS]	1084 Kg [2390 LBS]	244 Kg [538 LBS]		1258 Kg [2773 LBS]	1258 Kg [2773 LBS]	244 Kg [538 LBS]
	941 Kg [2075 LBS]	1084 Kg [2390 LBS]	244 Kg [538 LBS]		1166 Kg [2571 LBS]	1166 Kg [2571 LBS]	152 Kg [335 LBS]
40kW 4Q7 45kW 4P7	977 Kg [2154 LBS]	1084 Kg [2390 LBS]	244 Kg [538 LBS]				
	982 Kg [2165 LBS]	1092 Kg [2399 LBS]	244 Kg [538 LBS]				
	982 Kg [2165 LBS]	1092 Kg [2399 LBS]	244 Kg [538 LBS]				
45kW 4P8/4Q8	997 Kg [2198 LBS]	1092 Kg [2399 LBS]	244 Kg [538 LBS]				
	1002 Kg [2209 LBS]	1142 Kg [2518 LBS]	239 Kg [527 LBS]				
	1002 Kg [2209 LBS]	1142 Kg [2518 LBS]	239 Kg [527 LBS]				
45kW 4P10/4Q10	1040 Kg [2293 LBS]	1142 Kg [2518 LBS]	239 Kg [527 LBS]				
	1045 Kg [2304 LBS]	1147 Kg [2529 LBS]	244 Kg [538 LBS]				
	1045 Kg [2304 LBS]	1147 Kg [2529 LBS]	244 Kg [538 LBS]				
50 4P7/4Q7	1079 Kg [2379 LBS]	1147 Kg [2529 LBS]	244 Kg [538 LBS]				
	1084 Kg [2390 LBS]	1147 Kg [2529 LBS]	244 Kg [538 LBS]				
	1084 Kg [2390 LBS]	1147 Kg [2529 LBS]	244 Kg [538 LBS]				
50 4P10/4Q10	1142 Kg [2518 LBS]	1147 Kg [2529 LBS]	244 Kg [538 LBS]				
	1147 Kg [2529 LBS]	1147 Kg [2529 LBS]	244 Kg [538 LBS]				
	1147 Kg [2529 LBS]	1147 Kg [2529 LBS]	244 Kg [538 LBS]				

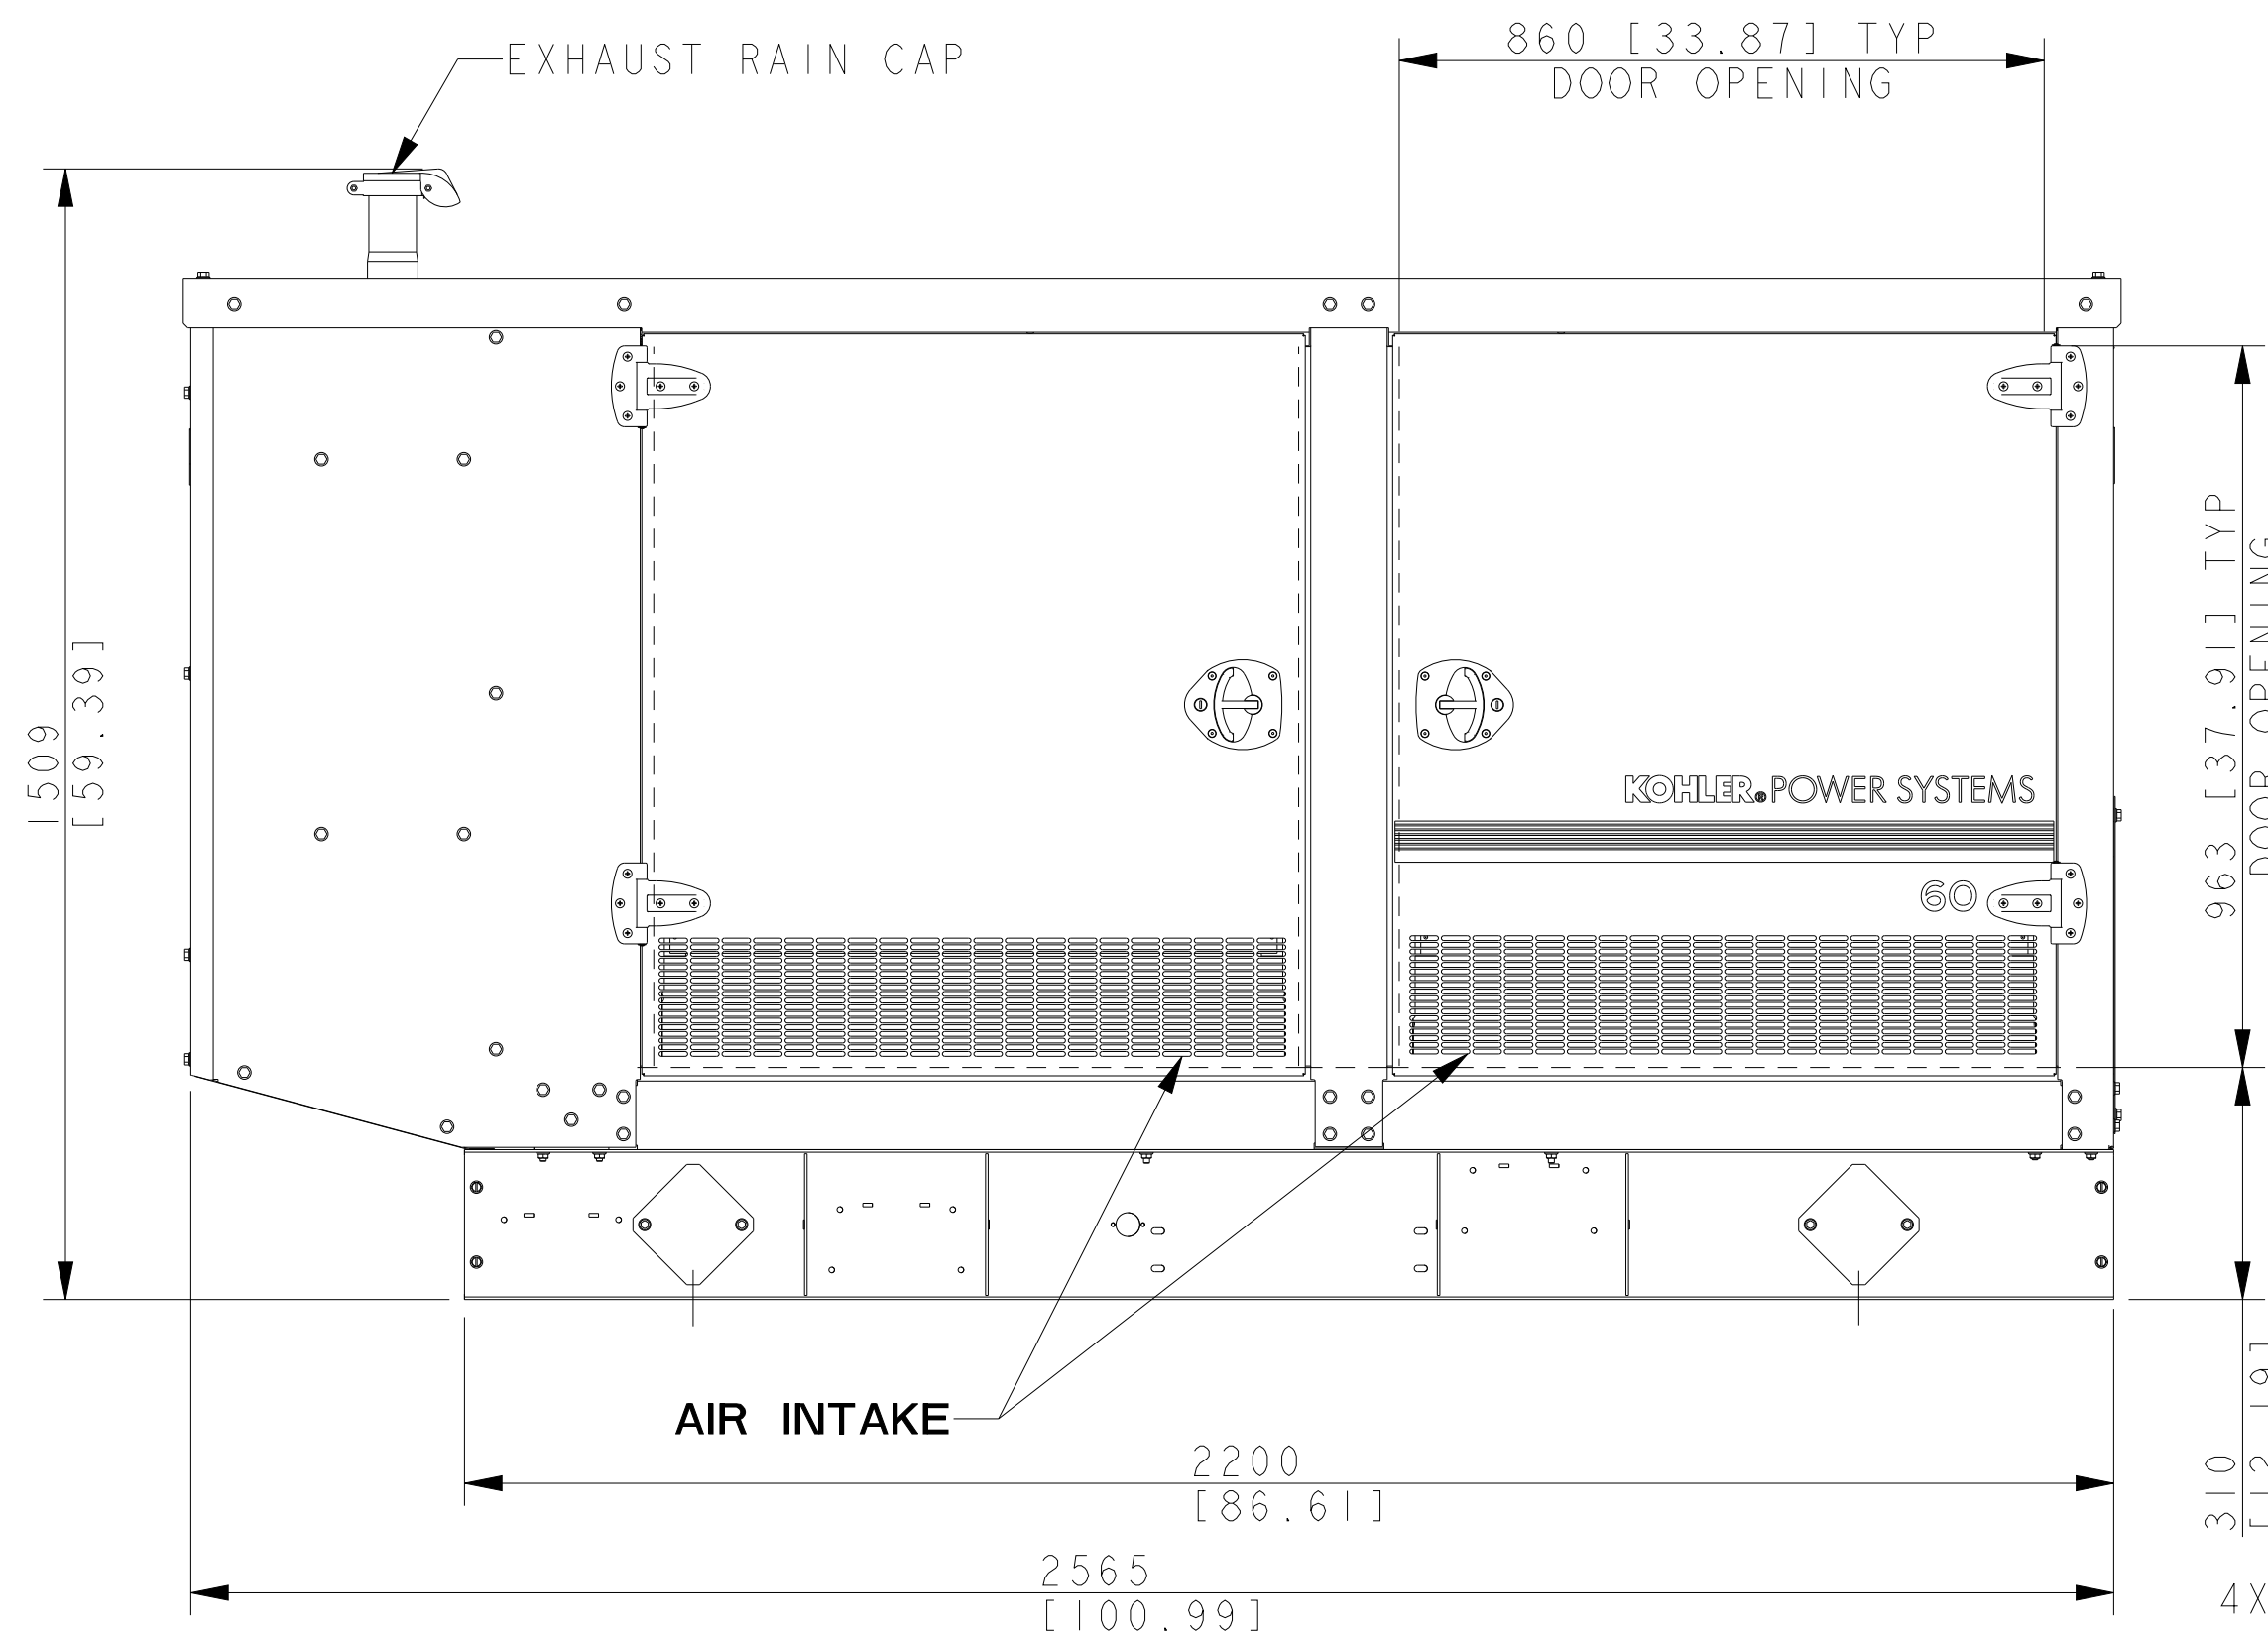

NOTE:
IF IBC CERTIFICATION IS REQUIRED, SEE SEISMIC
ADV FOR INSTALLATION INSTRUCTIONS

25-60 KW GM
2009 EMISSIONS MODELS
3PH RECONNECTABLE, 1PH
AND 600V ALTERNATORS

REV	DATE	ON COMPOSITE DWGS, SEE PART NO. FOR REVISION LEVEL	BY	UNLESS OTHERWISE SPECIFIED - 1) DIMENSIONS ARE IN MILLIMETERS 2) TOLERANCES ARE:
-	12-9-08	NEW DRAWING [86813]	PLD	X, XX ± 0.25
A	2-3-09	SKID VIEWS UPDATED & (C-4, D-2) CHART REVISED TO REFLECT 2009 EMISSIONS MODELS [87040]	PLD	X, X ± 1.0
B	6-1-09	(B-8) 1509 WAS 1386 (D-8) 393 WAS 397 [87272]	SAM	X ANGLES ± 0° 30' MAX.
C	1-7-10	(C-5) MODEL 50 4P8 ADDED TO TABLE [88885]	PKD	THIRD ANGLE PROJECTION
D	2-8-10	(D, C-5.2) GENSET WEIGHTS UPDATED [89102]	SAM	APPROVALS
E	4-27-10	(D-3) 50KW 4P8/60KW 4Q8 WAS 60KW 4P8/4Q8 [89613]	SAM	DATE
				DRAWN PLD 12-9-08
				CHECKED PLD 12-9-08
				APPROVED RJD 12-9-08

KOHLER CO. METRIC PRO-E
POWER SYSTEMS, KOHLER, WI 53044 U.S.A.
THIS DRAWING IN DESIGN AND DETAIL IS KOHLER CO.
PROPERTY AND MUST NOT BE USED EXCEPT IN
CONNECTION WITH KOHLER CO. WORK. ALL RIGHTS OF
DESIGN OR INVENTION ARE RESERVED.

TITLE: **DIMENSION PRINT,
25-60 KW GM ENCLOSURE**

SCALE: 0.10 CAD NO. SHEET 1 of 1

DWG NO. **ADV-7657** D

DIMENSIONS IN [] ARE INCH EQUIVALENTS