





Applicable to the following:

20-60REOZJC
50/60REOZJD
80-275REOZJE
80-200REOZJF
125REOZJG
300REOZJ

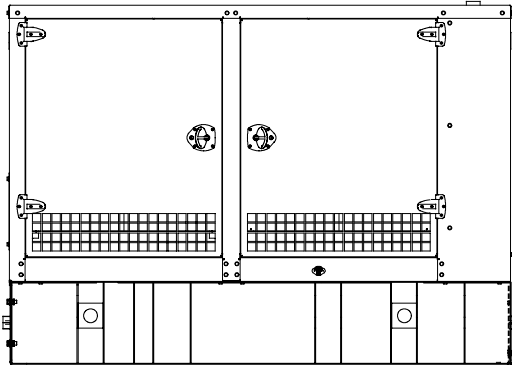

Enclosure with Standard Subbase Fuel Tank

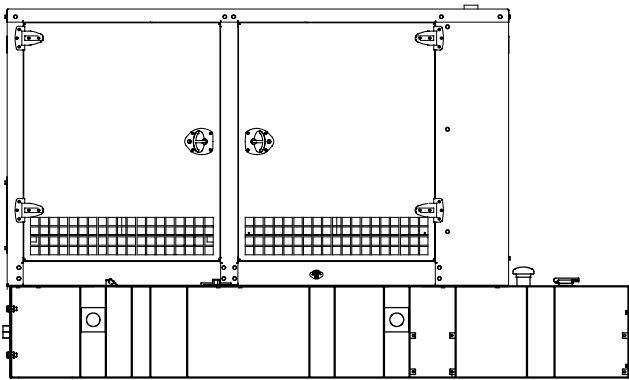

Enclosure with State Code Subbase Fuel Tank

Weather Enclosure Standard Features

- Internal-mounted critical silencer and flexible exhaust connector.
- Lift base or tank-mounted, steel construction with hinged doors.
- Fade-, scratch-, and corrosion-resistant Kohler® cream beige powder-baked finish.
- Lockable, flush-mounted door latches.
- Vertical air inlet and outlet discharge to redirect air and reduce noise.
- Certified to withstand 241 kph (150 mph) wind load rating. Available on all models, except 80-150REOZJE with steel enclosure and 125REOZJF with steel enclosure.


Sound Enclosure Standard Features

- Includes all of the weather enclosure features with the addition of acoustic insulation material.
- Lift base or tank-mounted, steel or aluminum construction with hinged doors. Aluminum enclosures are recommended for high humidity and/or high salt/coastal regions.
- Acoustic insulation that meets UL 94 HF1 flammability classification and repels moisture absorption.
- Sound attenuated enclosure that uses up to 51 mm (2 in.) of acoustic insulation.

Subbase Fuel Tank Features

- The above-ground rectangular secondary containment tank mounts directly to the generator set, below the generator set skid (subbase).
- Both the inner and outer tanks have emergency relief vents.
- Flexible fuel lines are provided with subbase fuel tank selection.
- The secondary containment generator set base tank meets UL 142 tank requirements. The inner (primary) tank is sealed inside the outer (secondary) tank. The outer tank contains the fuel if the inner tank leaks or ruptures.

Weather and Sound Enclosure

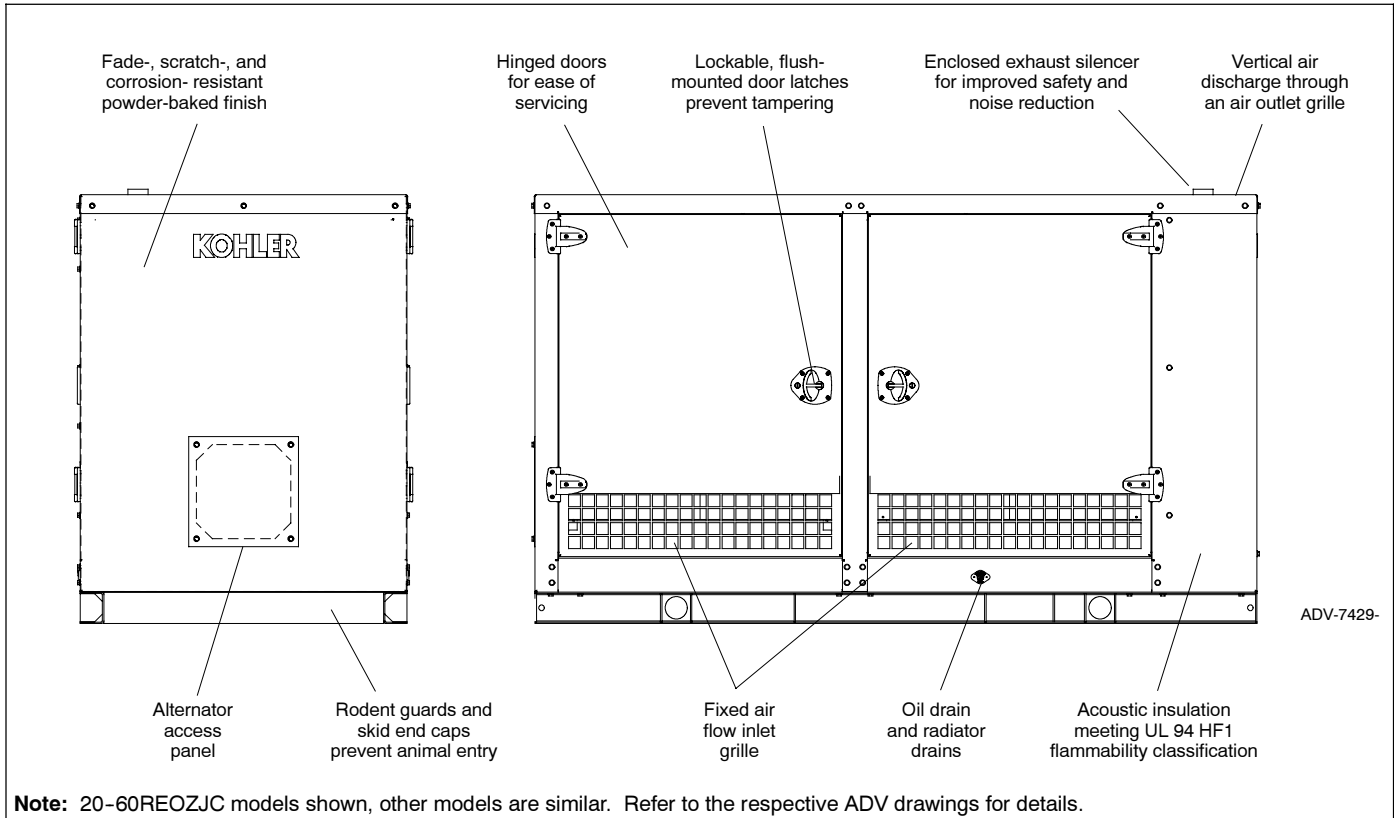


Enclosure Features

- Available in steel (14 gauge) formed panel, solid construction. Preassembled package offering corrosion resistant, dent resilient structure mounting directly to lift base or fuel tank.
- Powder-baked paint. Superior finish, durability, and appearance.
- Internal critical exhaust silencer offering maximum component life and operator safety.
- Interchangeable modular panel construction. Allows complete serviceability or replacement without compromising enclosure design.
- Cooling/combustion air intake with a horizontal air inlet. Sized for maximum cooling airflow.
- Service access. Multi-personnel doors for easy access to generator set control and servicing of the fuel fill, fuel gauge, oil fill, and battery.
- Cooling air discharge. Weather protective design featuring a vertical air discharge outlet grille. Redirects cooling air up and above enclosure to reduce ambient noise.

Additional Sound Enclosure Features

- Available in steel (14 gauge) or aluminum 3.2 mm (0.125 in.) formed panel, solid construction.
- Attenuated design. Acoustic insulation UL 94 HF1 listed for flame resistance offering up to 51 mm (2 in.) mechanically restrained acoustic insulation.
- Cooling air discharge. The sound enclosures include acoustic insulation with urethane film.


Subbase Fuel Tank

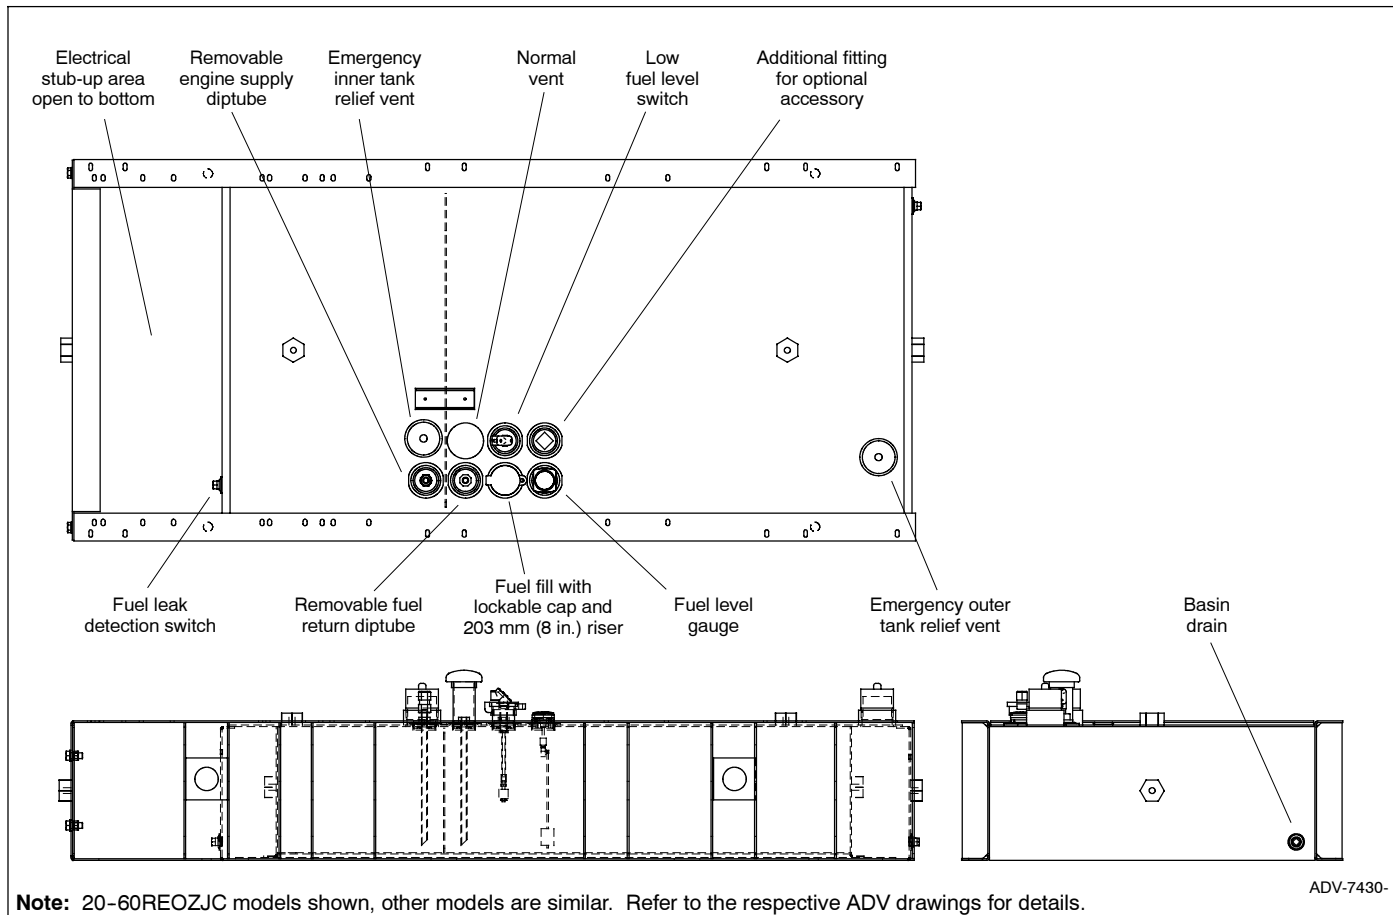

Standard Subbase Fuel Tank Features

- Extended operation. Usable tank capacity offers full load standby operation of up to 72 hours.
- UL listed. Secondary containment generator set base tank meeting UL 142 requirements.
- NFPA compliant. Designed to comply with the installation standards of NFPA 30 and NFPA 37.
- Integral external lift lugs. Enables crane with spreader-bar lifting of the complete package (empty tank, mounted generator set, and enclosure) to ensure safety.
- Emergency pressure relief vents. Vents ensure adequate venting of the inner and outer tank under extreme pressure and/or emergency conditions.
- Normal vent with cap. Vent is raised above lockable fuel fill.
- Low fuel level switch. Annunciates a 50% low fuel level condition at generator set control.
- Leak detection switch. Annunciates a contained primary tank fuel leak condition at generator set control.
- Electrical stub-up.
- State tank designed to comply with the installation standards of the Florida Dept. of Environmental Protection (FDEP) File No. EQ-634.

State Code Subbase Fuel Tank

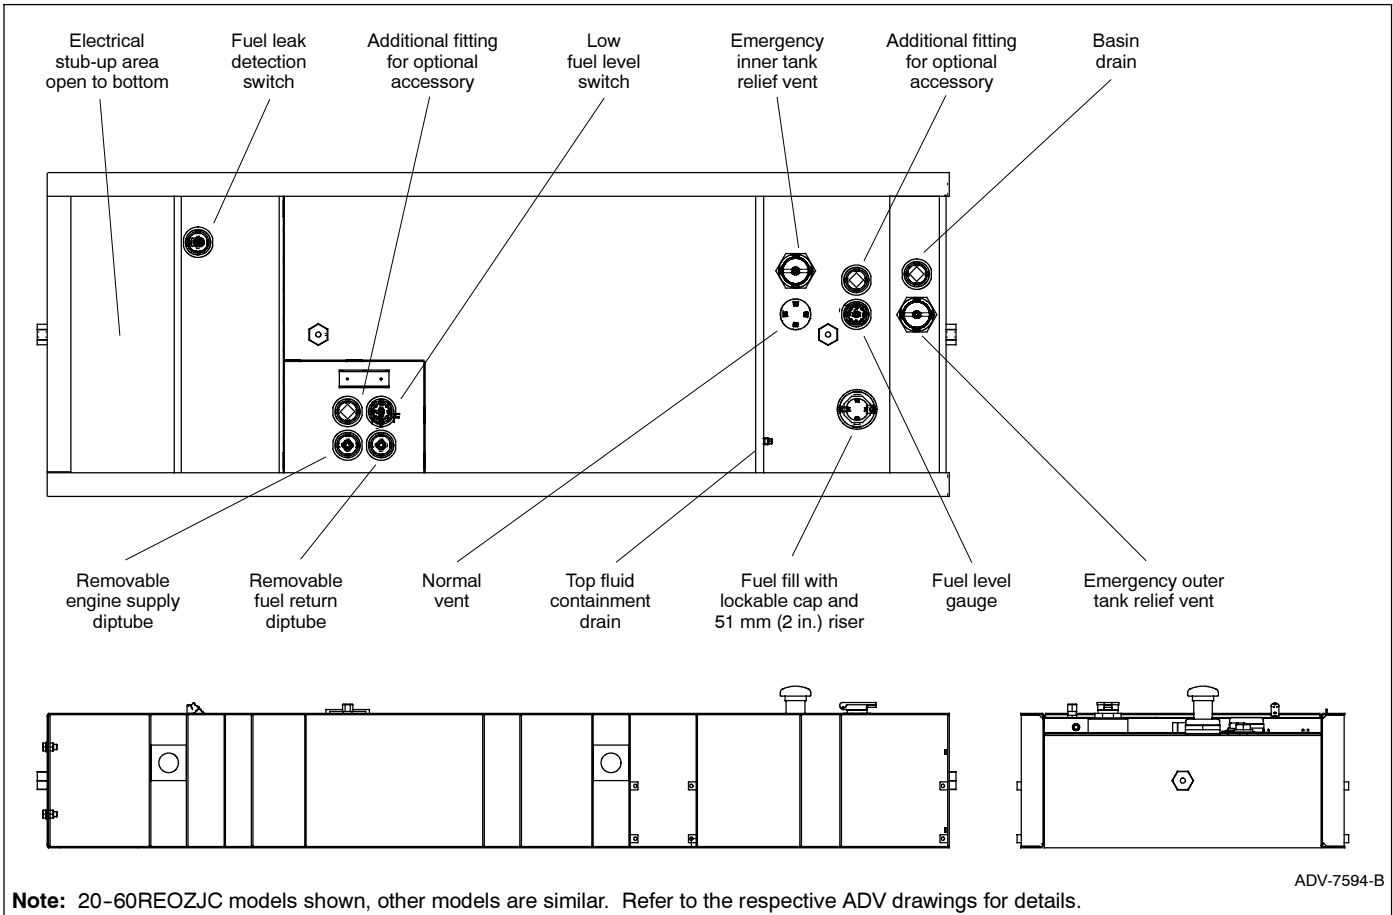

State Code Subbase Fuel Tank Options

Bottom Clearance/Coating

- I-beams, provides 106 mm (4.2 in.) of ground clearance
- Epoxy mastic coating

Fuel in Basin Options

- Fuel in basin switch, Florida Dept. of Environmental Protection (FDEP) File No. EQ-682 approved

Fuel Fill Options

- Fill pipe extension to within 152 mm (6 in.) of bottom of fuel tank.
- 18.9 L (5 gallon) spill containment with 95% shutoff
- 18.9 L (5 gallon) spill containment
- 18.9 L (5 gallon) spill containment fill to within 152 mm (6 in.) of bottom of fuel tank
- 26.5 L (7 gallon) spill containment, Florida Dept. of Environmental Protection (FDEP) File No. EQ-226 approved
- 26.5 L (7 gallon) spill containment with 95% shutoff, Florida Dept. of Environmental Protection (FDEP) File No. EQ-226 approved

Fuel Supply Options

- Fire safety valve (installed on fuel supply line)
- Ball valve (installed on fuel supply line)

High Fuel Level Switch

- High fuel level switch
- High fuel level switch, Florida Dept. of Environmental Protection (FDEP) File No. EQ-682 approved

Normal Vent Options

- 3.7 m (12 ft.) above grade (without spill containment)
- 3.7 m (12 ft.) above grade (with spill containment)

Tank Marking Options

- Decal, Combustible Liquids - Keep Fire Away (qty. 2)
- Decal, NFPA 704 identification (qty. 2)
- Decal, tank number and safe fuel fill height (qty. 2)
- Decal, tank number and safe fuel fill height, NFPA 704 identification

Enclosure and Subbase Fuel Tank Specifications

Fuel Tank Capacity, L (gal.)	Est. Fuel Supply Hours at 60 Hz w/Full Load Nominal/Actual	Enclosure and Subbase Fuel Tank					Fuel Tank Height, mm (in.)	Sound Enclosure, Sound Pressure at 7 m (23 ft.), dB(A)
		Max. Dimensions, mm (in.)			Weight, kg (lb.)			
		Length	Width	Height	With Steel Enclosure	With Aluminum Enclosure		
20REOZJC								
Lifting Base	0	2320 (91.3)	1077 (42.4)	1384 (54.6)	943 (2080)	830 (1830)	100 (4)	68
294 (78)	24/41			1671 (65.8)	1272 (2806)*	1159 (2556)*	254 (10)	
427 (113)	36/60			1773 (69.8)	1321 (2913)*	1208 (2663)*	358 (14)	
626 (165)	48/87			1925 (75.8)	1393 (3073)*	1280 (2823)*	508 (20)	
20REOZJC with State Code Fuel Tank†								
442 (116)	24/61	2896 (114)	1040 (40.9)	1671 (65.8)	1362 (3003)*	1249 (2753)*	358 (14)	68
558 (147)	48/77			1849 (72.8)	1459 (3217)*	1346 (2967)*	432 (17)	
960 (253)	72/133			2103 (82.8)	1514 (3338)*	1401 (3088)*	686 (27)	
30REOZJC								
Lifting Base	0	2320 (91.3)	1077 (42.4)	1384 (54.6)	1007 (2220)	894 (1970)	100 (4)	68
294 (78)	24/27			1671 (65.8)	1336 (2946)*	1223 (2696)*	254 (10)	
427 (113)	36/40			1773 (69.8)	1385 (3053)*	1271 (2803)*	358 (14)	
626 (165)	48/59			1925 (75.8)	1457 (3213)*	1344 (2963)*	508 (20)	
30REOZJC with State Code Fuel Tank†								
442 (116)	24/41	2896 (114)	1040 (40.9)	1671 (65.8)	1424 (3139)*	1311 (2889)*	358 (14)	68
558 (147)	48/52			1849 (72.8)	1521 (3353)*	1408 (3103)*	432 (17)	
960 (253)	72/90			2103 (82.8)	1576 (3474)*	1463 (3224)*	686 (27)	
40REOZJC								
Lifting Base	0	2320 (91.3)	1077 (42.4)	1384 (54.6)	966 (2130)	853 (1880)	100 (4)	68
427 (113)	24/33			1773 (69.8)	1344 (2963)*	1231 (2713)*	358 (14)	
626 (165)	48/59			1925 (75.8)	1416 (3123)*	1303 (2873)*	508 (20)	
958 (253)	72/90			2179 (85.8)	1736 (3826)*	1622 (3576)*	762 (30)	
40REOZJC with State Code Fuel Tank†								
442 (116)	24/34	2896 (114)	1040 (40.9)	1671 (65.8)	1451 (3199)*	1338 (2949)*	358 (14)	68
960 (253)	48/74			2103 (82.8)	1575 (3472)*	1462 (3222)*	686 (27)	
1411 (372)	72/109			2332 (91.8)	1726 (3805)*	1613 (3555)*	914 (36)	
50REOZJC and 50REOZJD								
Lifting Base	0	2320 (91.3)	1077 (42.4)	1384 (54.6)	1027 (2265)	914 (2015)	100 (4)	68
427 (113)	24/26			1773 (69.8)	1405 (3098)*	1292 (2848)*	358 (14)	
626 (165)	36/38			1925 (75.8)	1477 (3258)*	1364 (3008)*	508 (20)	
958 (253)	48/58			2179 (85.8)	1736 (3826)*	1622 (3576)*	762 (30)	
50REOZJC and 50REOZJD with State Code Fuel Tank†								
442 (116)	24/27	2896 (114)	1040 (40.9)	1824 (71.8)	1529 (3371)*	1416 (3121)*	358 (14)	68
960 (253)	48/58			2103 (82.8)	1653 (3644)*	1540 (3394)*	686 (27)	
1411 (372)	72/86			2332 (91.8)	1804 (3977)*	1691 (3727)*	914 (36)	
60REOZJC and 60REOZJD								
Lifting Base	0	2320 (91.3)	1077 (42.4)	1384 (54.6)	1164 (2566)	1051 (2316)	100 (4)	68
493 (130)	24/26			1773 (69.8)	1566 (3452)*	1452 (3202)*	406 (16)	
792 (210)	36/42			2052 (80.8)	1687 (3719)*	1574 (3469)*	635 (25)	
958 (253)	48/50			2179 (85.8)	1736 (3826)*	1622 (3576)*	762 (30)	
60REOZJC and 60REOZJD with State Code Fuel Tank†								
598 (147)	24/29	2895 (114)	1040 (40.9)	1849 (72.8)	1616 (3563)*	1503 (3313)*	432 (17)	68
960 (253)	48/50			2103 (82.8)	1767 (3896)*	1654 (3646)*	686 (27)	
1411 (372)	72/74			2332 (91.8)	1918 (4228)*	1805 (3978)*	914 (36)	

Enclosure and Subbase Fuel Tank Specifications (continued)

Fuel Tank Capacity, L (gal.)	Est. Fuel Supply Hours at 60 Hz w/Full Load Nominal/Actual	Enclosure and Subbase Fuel Tank					Fuel Tank Height, mm (in.)	Sound Enclosure, Sound Pressure at 7 m (23 ft.), dB(A)
		Max. Dimensions, mm (in.)			Weight, kg (lb.)			
		Length	Width	Height	With Steel Enclosure	With Aluminum Enclosure		
80REOZJE and 80REOZJF								
Lifting Base	0	2821 (111.1)	1156 (45.5)	1525 (60)	1483 (3269)	1351 (2979)	102 (4)	68
757 (200)	24/29			1880 (74)	1851 (4080)*	1719 (3790)*	457 (18)	
1314 (347)	48/50			2185 (86)	2108 (4647)*	1976 (4357)*	762 (30)	
80REOZJE and 80REOZJF with State Code Fuel Tank†								
815 (215)	24/31	3400 (133.9)	1156 (45.5)	1855 (73)	1996 (4400)*	1864 (4110)*	432 (17)	68
1570 (415)	48/60			2185 (86)	2236 (4929)*	2104 (4639)*	762 (30)	
100REOZJE and 100REOZJF								
Lifting Base	0	2821 (111.1)	1156 (45.5)	1525 (60)	1592 (3510)	1461 (3220)	102 (4)	68
757 (200)	24/24			1880 (74)	1960 (4320)*	1828 (4030)*	457 (18)	
1700 (449)	48/55			3400 (133.9)	2185 (86)	2345 (5170)*	2214 (4880)*	
100REOZJE and 100REOZJF with State Code Fuel Tank†								
815 (215)	24/26	3400 (133.9)	1156 (45.5)	1855 (73)	2105 (4641)*	1974 (4351)*	432 (17)	68
1570 (415)	48/50			2185 (86)	2345 (5170)*	2214 (4880)*	762 (30)	
125REOZJF and 125REOZJG								
Lifting Base	0	3532 (139.0)	1153 (45.4)	1753 (69)	1651 (3632)	1515 (3333)	0 (0)	71
1131 (298)	24/32			2236 (88)	2400 (5280)*	2264 (4981)*	483 (19)	
2207 (583)	48/63			2667 (105)	2751 (6052)*	2615 (5753)*	914 (36)	
125REOZJF and 125REOZJG with State Code Fuel Tank†								
1198 (316)	24/34	4414 (173.8)	1153 (45.4)	2236 (88)	2382 (5240)*	2446 (4941)*	483 (19)	71
2255 (595)	48/65			2591 (102)	2654 (5839)*	2518 (5540)*	838 (33)	
150REOZJE and 150REOZJF								
Lifting Base	0	3532 (139.0)	1153 (45.4)	1753 (69)	1860 (4101)	1724 (3800)	0 (0)	73
1131 (298)	24/25			2236 (88)	2609 (5752)*	2473 (5452)*	483 (19)	
2207 (583)	48/50			2667 (105)	2960 (6526)*	2824 (6226)*	914 (36)	
150REOZJE and 150REOZJF with State Code Fuel Tank†								
1198 (316)	24/27	4414 (173.8)	1153 (45.4)	2236 (88)	2591 (5712)*	2455 (5412)*	483 (19)	73
2255 (595)	48/51			2591 (102)	2863 (6311)*	2727 (6012)*	838 (33)	
180REOZJE and 180REOZJF								
Lifting Base	0	4094 (161.2)	1300 (51.2)	2128 (84)	1928 (4250)	1780 (3925)	0 (0)	72
1514 (400)	24/29			2611 (103)	2861 (6307)*	2713 (5981)*	483 (19)	
2871 (758)	48/56			3017 (119)	3255 (7176)*	3107 (6850)*	889 (35)	
180REOZJE and 180REOZJF with State Code Fuel Tank†								
1576 (416)	24/31	5008 (197.2)	1300 (51.2)	2585 (102)	3162 (6971)*	3014 (6646)*	457 (18)	72
2896 (765)	48/56			2890 (114)	3488 (7690)*	3340 (7363)*	762 (30)	
200REOZJE and 200REOZJF								
Lifting Base	0	4094 (161.2)	1300 (51.2)	2128 (84)	2309 (5090)	2161 (4764)	0 (0)	73
1514 (400)	24/26			2611 (103)	3242 (7147)*	3094 (6821)*	483 (19)	
2871 (758)	48/50			3017 (119)	3636 (8016)*	3488 (7690)*	889 (35)	
200REOZJE and 200REOZJF with State Code Fuel Tank†								
1576 (416)	24/27	5008 (197.2)	1300 (51.2)	2585 (102)	3543 (7811)*	3395 (7485)*	457 (18)	73
2896 (765)	48/50			2890 (114)	3869 (8530)*	3721 (8203)*	762 (30)	

Enclosure and Subbase Fuel Tank Specifications (continued)

Fuel Tank Capacity, L (gal.)	Est. Fuel Supply Hours at 60 Hz w/Full Load Nominal/Actual	Enclosure and Subbase Fuel Tank					Fuel Tank Height, mm (in.)	Sound Enclosure, Sound Pressure at 7 m (23 ft.), dB(A)
		Max. Dimensions, mm (in.)			Weight, kg (lb.)			
		Length	Width	Height	With Steel Enclosure	With Aluminum Enclosure		
230REOZJE								
Lifting Base	0	4121 (162.3)	1338 (52.7)	2157 (84.9)	2654 (5850)	2540 (5600)	0 (0)	75
1787 (472)	24/29			2659 (104.7)	3561 (7850)*	3447 (7600)*	762 (30)	
230REOZJE with State Code Fuel Tank†								
2102 (555)	24/34	5009 (197.2)	1338 (52.7)	2792 (109.9)	3895 (8587)*	3782 (8337)*	635 (25)	75
3573 (944)	48/59	5325 (209.7)		3071 (120.9)	4504 (9930)*	4391 (9680)*	914 (36)	
250REOZJE								
Lifting Base	0	4121 (162.3)	1338 (52.7)	2157 (84.9)	2699 (5950)	2585 (5700)	0 (0)	75
1787 (472)	24/27			2659 (104.7)	3606 (7950)*	3493 (7700)*	762 (30)	
250REOZJE with State Code Fuel Tank†								
2102 (555)	24/32	5009 (197.2)	1338 (52.7)	2792 (109.9)	3940 (8687)*	3827 (8437)*	635 (25)	75
3573 (944)	48/54	5325 (209.7)		3071 (120.9)	4550 (10030)*	4436 (9780)*	914 (36)	
275REOZJE								
Lifting Base	0	4121 (162.3)	1338 (52.7)	2157 (84.9)	2835 (6250)	2722 (6000)	0 (0)	75
1787 (472)	24/24			2659 (104.7)	3742 (8250)*	3629 (8000)*	762 (30)	
275REOZJE with State Code Fuel Tank†								
2102 (555)	24/28	5009 (197.2)	1338 (52.7)	2792 (109.9)	4076 (8987)*	3963 (8737)*	635 (25)	75
3573 (944)	48/48	5325 (209.7)		3071 (120.9)	4686 (10330)*	4572 (10080)*	914 (36)	
300REOZJ								
Lifting Base	0	4121 (162.3)	1338 (52.7)	2157 (84.9)	2835 (6250)	2722 (6000)	0 (0)	75
2070 (546)	24/25			2735 (107.7)	3770 (8311)*	3656 (8061)*	838 (33)	
300REOZJ with State Code Fuel Tank†								
2102 (555)	24/25	5009 (197.2)	1338 (52.7)	2792 (109.9)	4076 (8987)*	3963 (8737)*	635 (25)	75
4066(1074)	48/48	5588 (220.0)		3071 (120.9)	4644 (10238)*	4530 (9988)*	914 (36)	

Note: Refer to the respective ADV drawings for details.

* Weight includes the generator set (wet), enclosure, silencer, and tank (no fuel).


† State code fuel tank specifications (height and weight) include I-beam option.

The generator set weight represents using the largest alternator option. The enclosure weight is with acoustic insulation added.

KOHLER CO., Kohler, Wisconsin 53044 USA
Phone 920-457-4441, Fax 920-459-1646
For the nearest sales and service outlet in the
US and Canada, phone 1-800-544-2444
KohlerPower.com

Kohler Power Systems
Asia Pacific Headquarters
7 Jurong Pier Road
Singapore 619159
Phone (65) 6264-6422, Fax (65) 6264-6455

DISTRIBUTED BY:

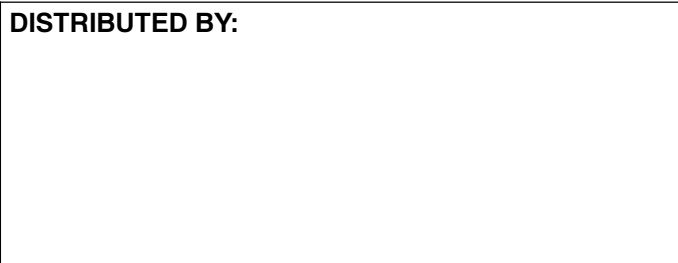

Availability is subject to change without notice. Kohler Co. reserves the right to change the design or specifications without notice and without any obligation or liability whatsoever. Contact your local Kohler® generator set distributor for availability.

© 2008, 2009, 2010, 2011 by Kohler Co. All rights reserved.