


**ISO 9001**  
KOHLER  
POWER SYSTEMS  
NATIONALLY REGISTERED

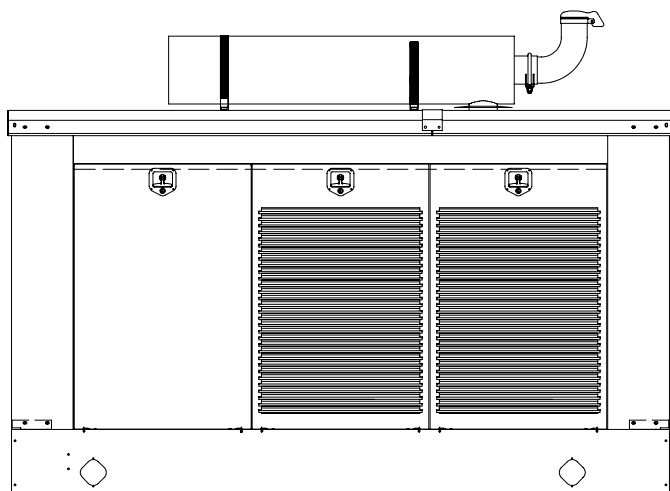

Applicable to the following:


**20ROZJB**  
**20-230REOZJB**  
**80-250REOZJC**  
**125-275REOZJD**

**Weather housing with externally-mounted silencer and generator set skid mounting**

Kohler® weather housings protect stationary generator sets from the elements, animal intrusion, and unwanted entry.

### Weather Housing Standard Features


- Roof-mounted critical silencer with tailpipe and rain cap
- Skid-mounted, fully corrosion-resistant material construction with hinged and removable doors
- Fade-, scratch-, and corrosion-resistant Kohler® cream beige and black powder-baked finish
- Lockable, flush-mounted door latches
- Air inlet louvers and baffles to minimize rain and snow entry

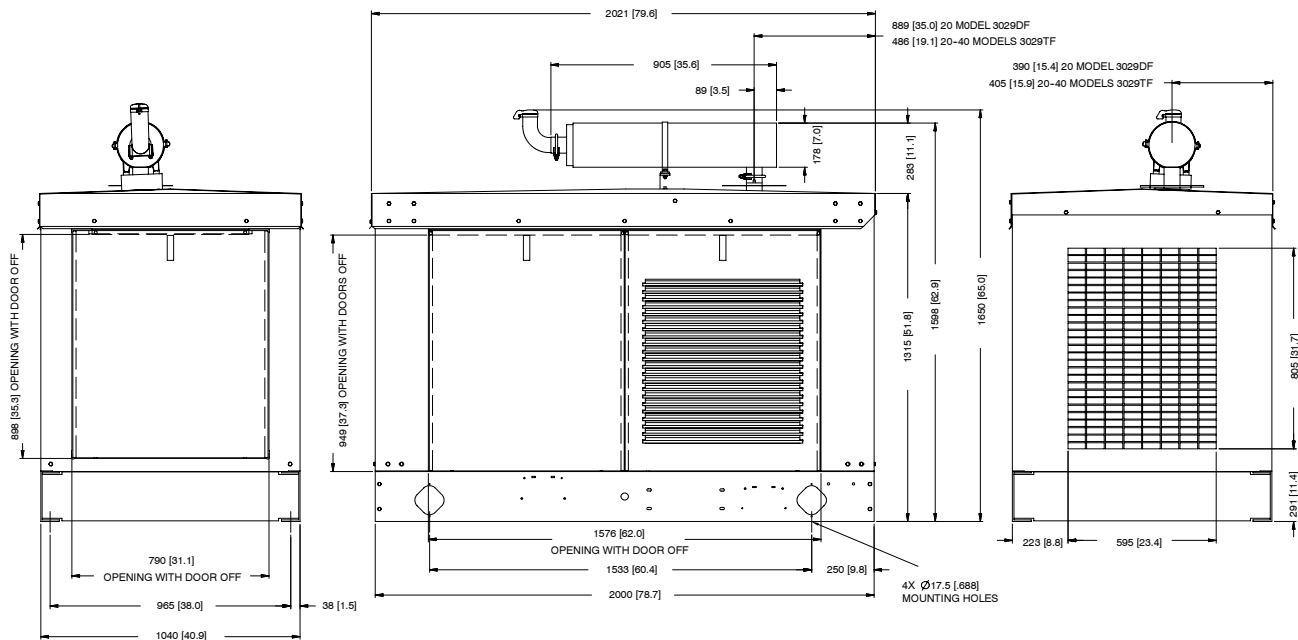

Dimensions: mm [in.]

20ROZJB and 20-40REOZJB with Silencer and Mounting  
John Deere 3029 Engine


ADV-6657A-B

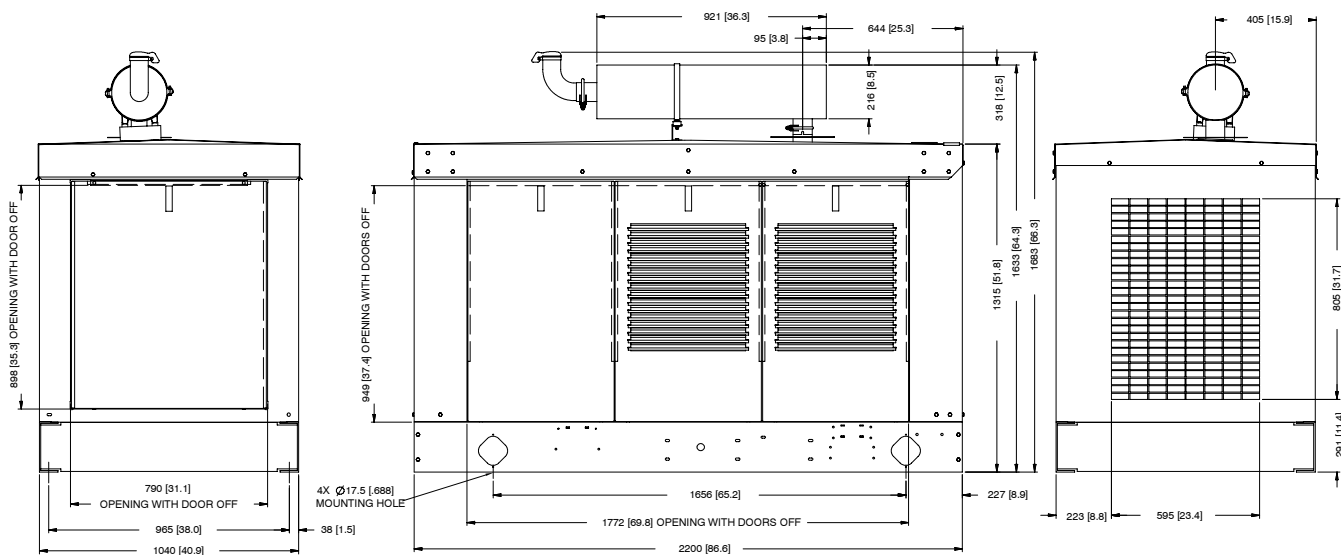


Dimensions: mm [in.]

50-80REOZJB with Silencer and Mounting  
John Deere 4045 Engine


ADV-6696A-B

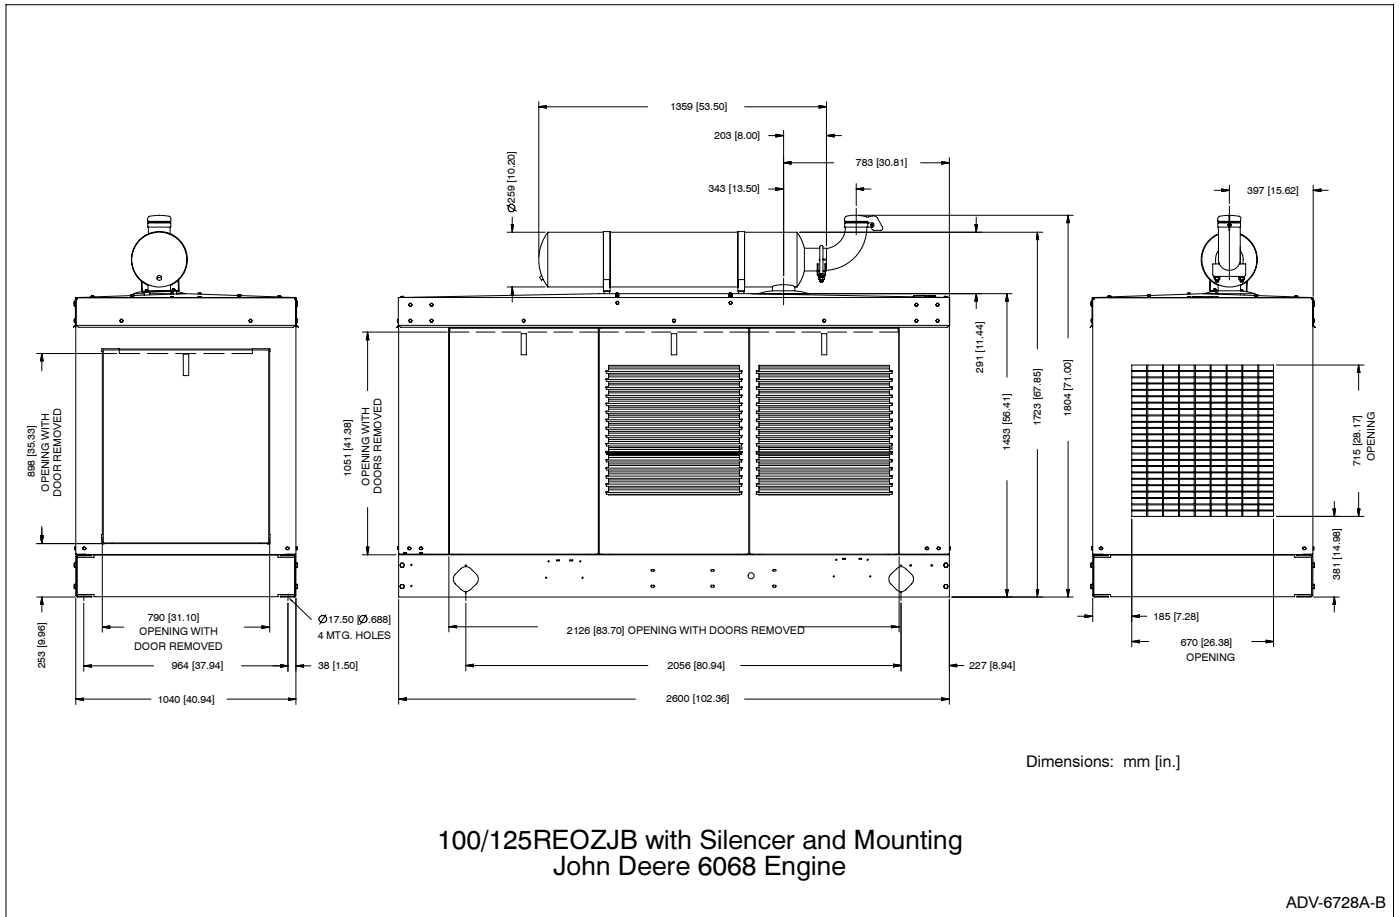

ADV-6728A-B

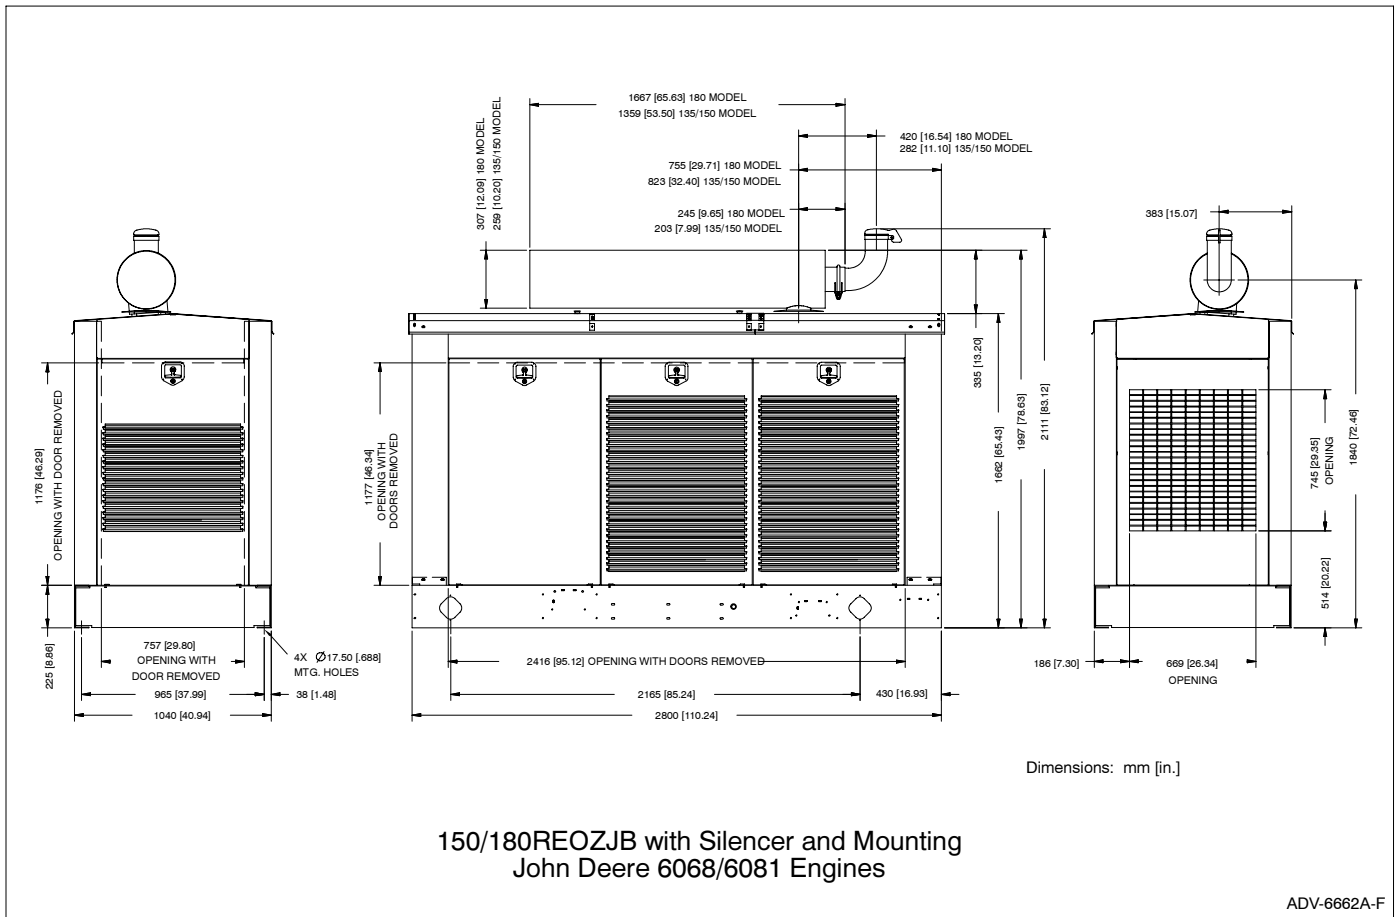


ADV-6662A-F

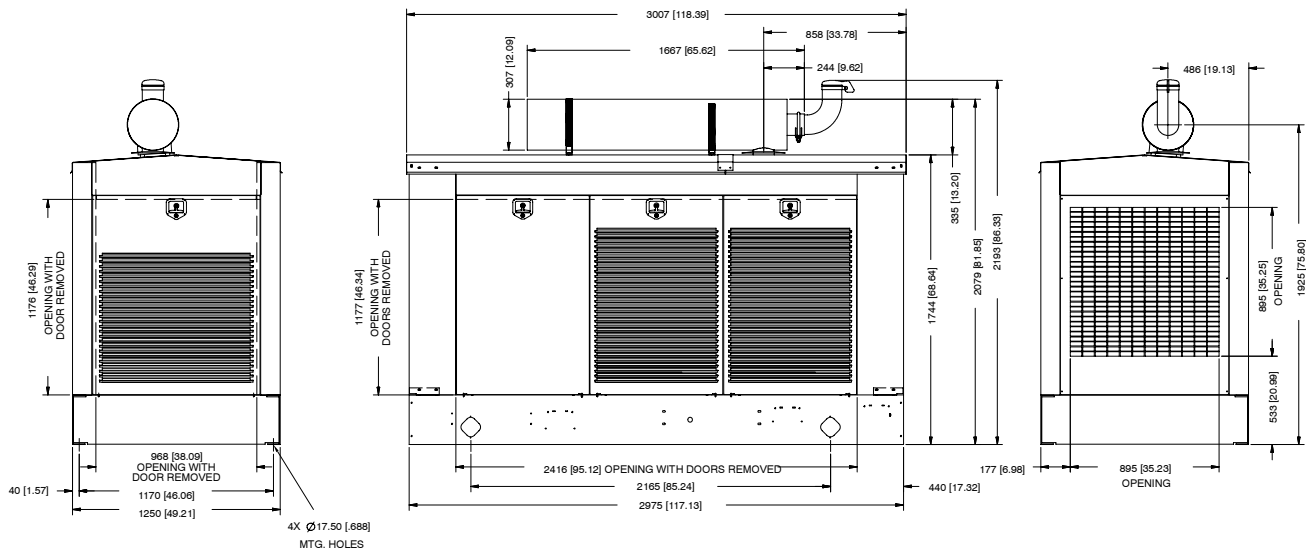

Dimensions: mm [in.]

200/230REOZJB with Silencer and Mounting  
John Deere 6081 Engine



ADV-6883A-E


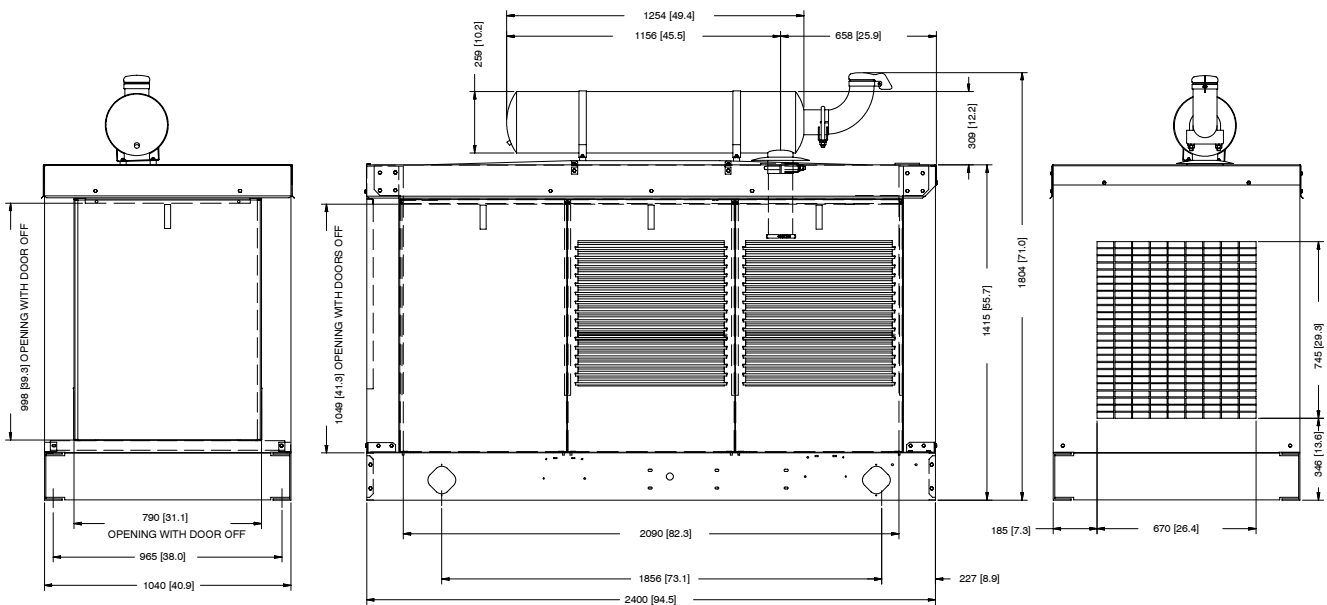




Dimensions: mm [in.]

80/100REOZJC with Silencer and Mounting  
John Deere 4045 Engine

ADV-6883A-C

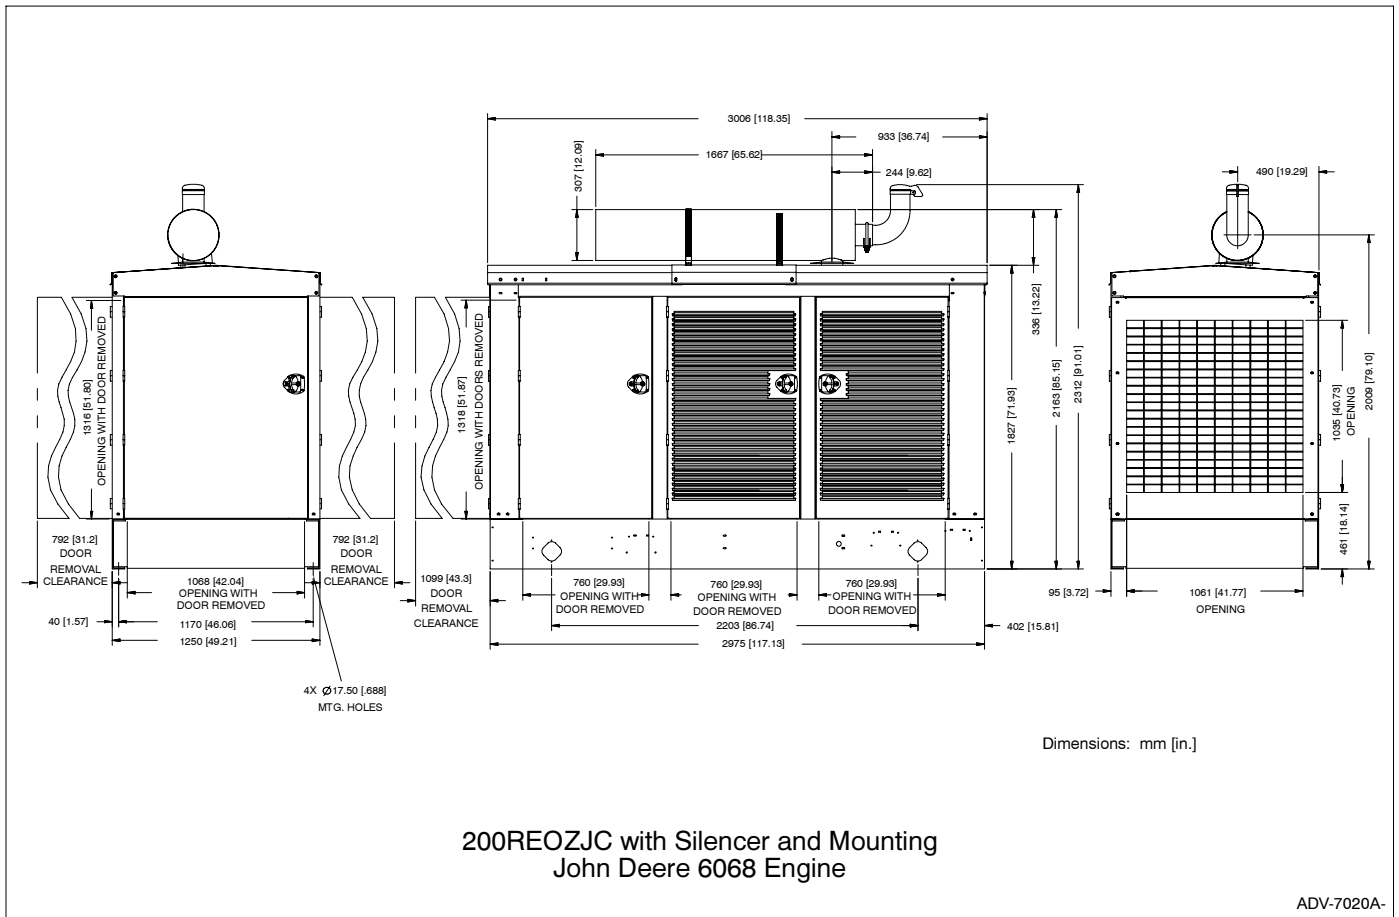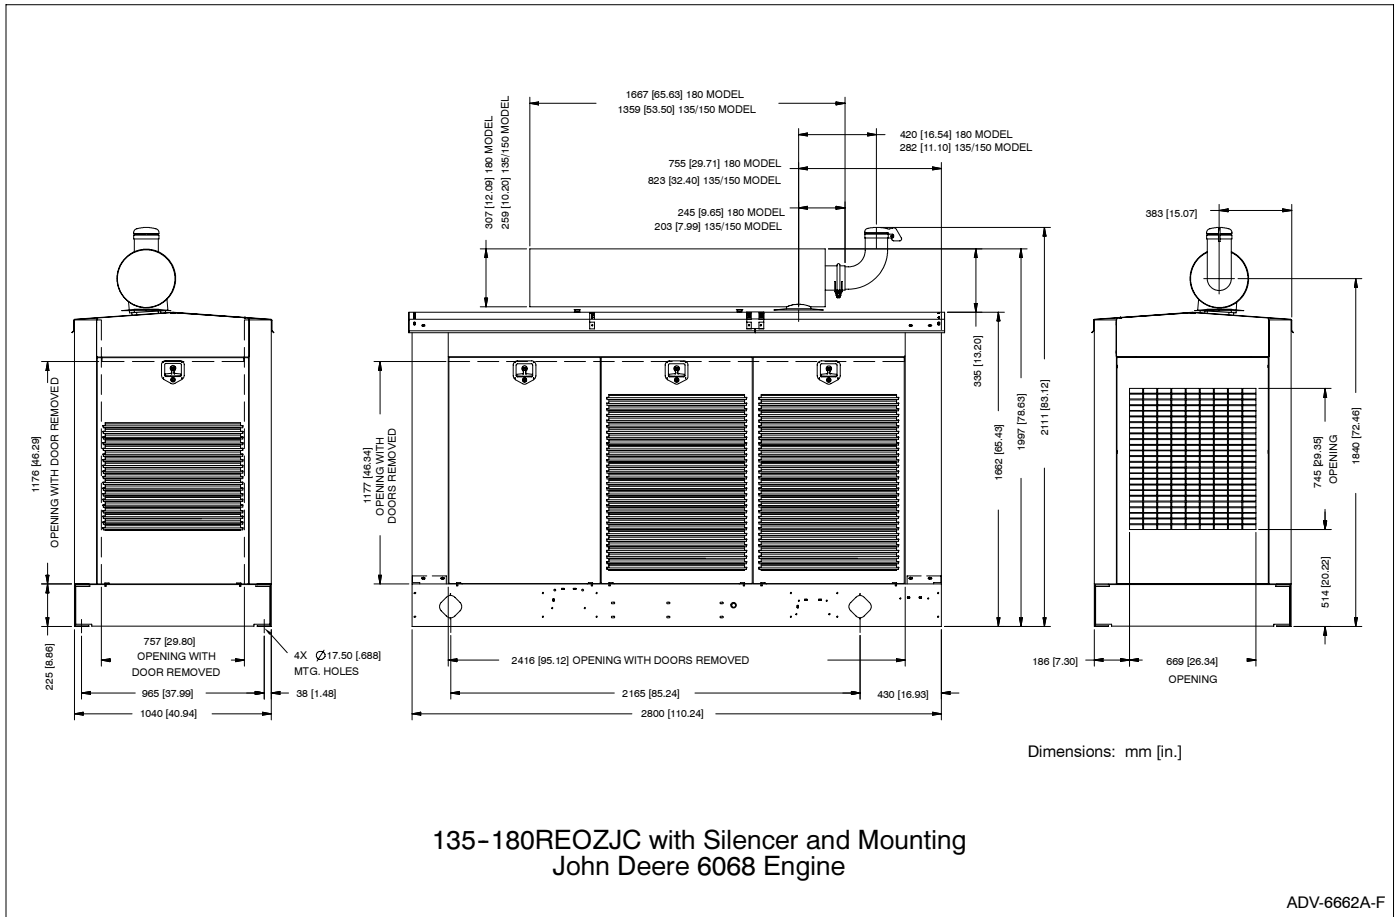

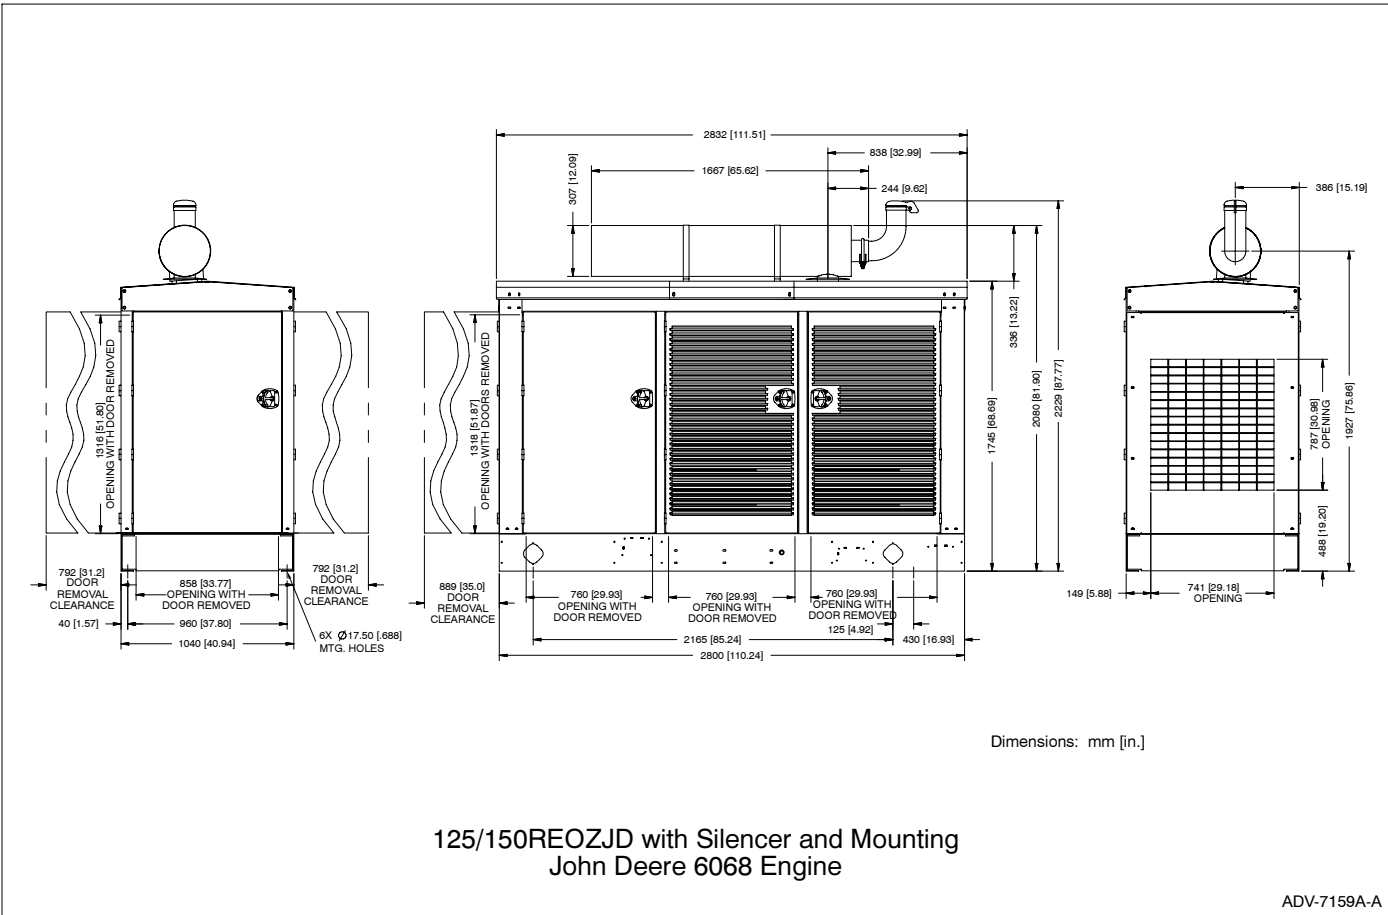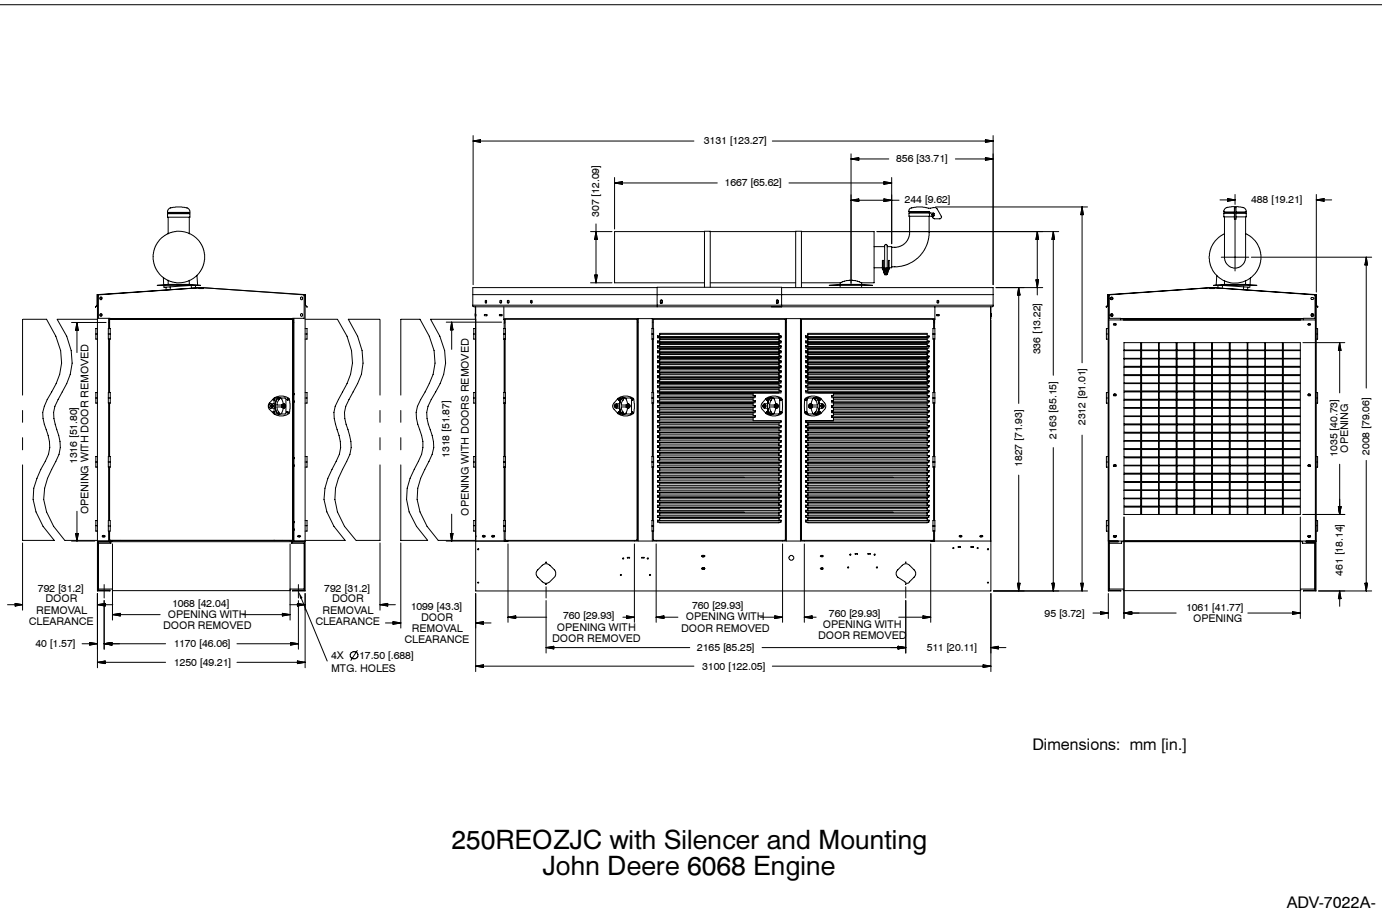


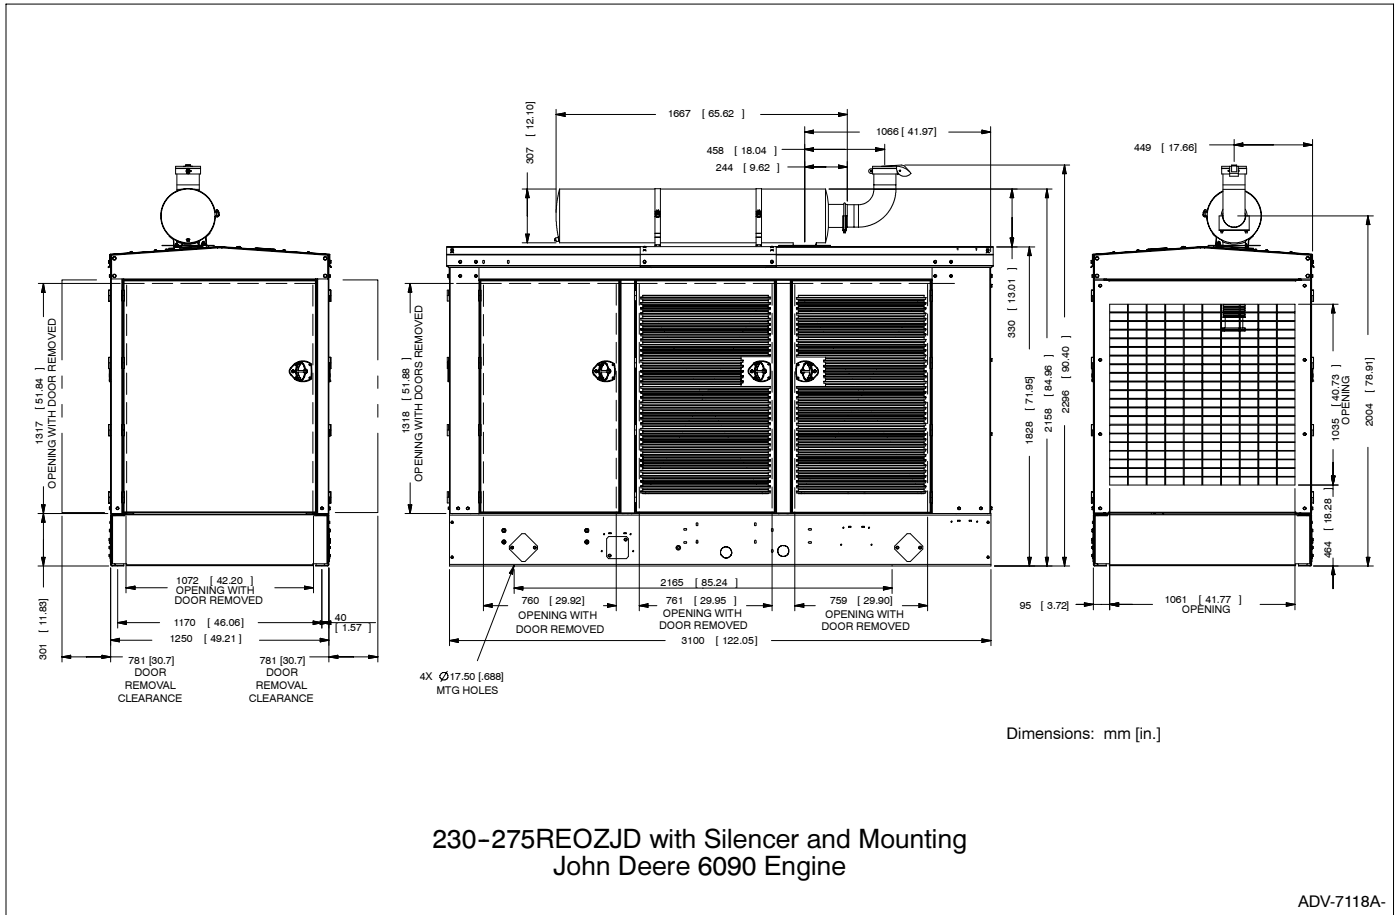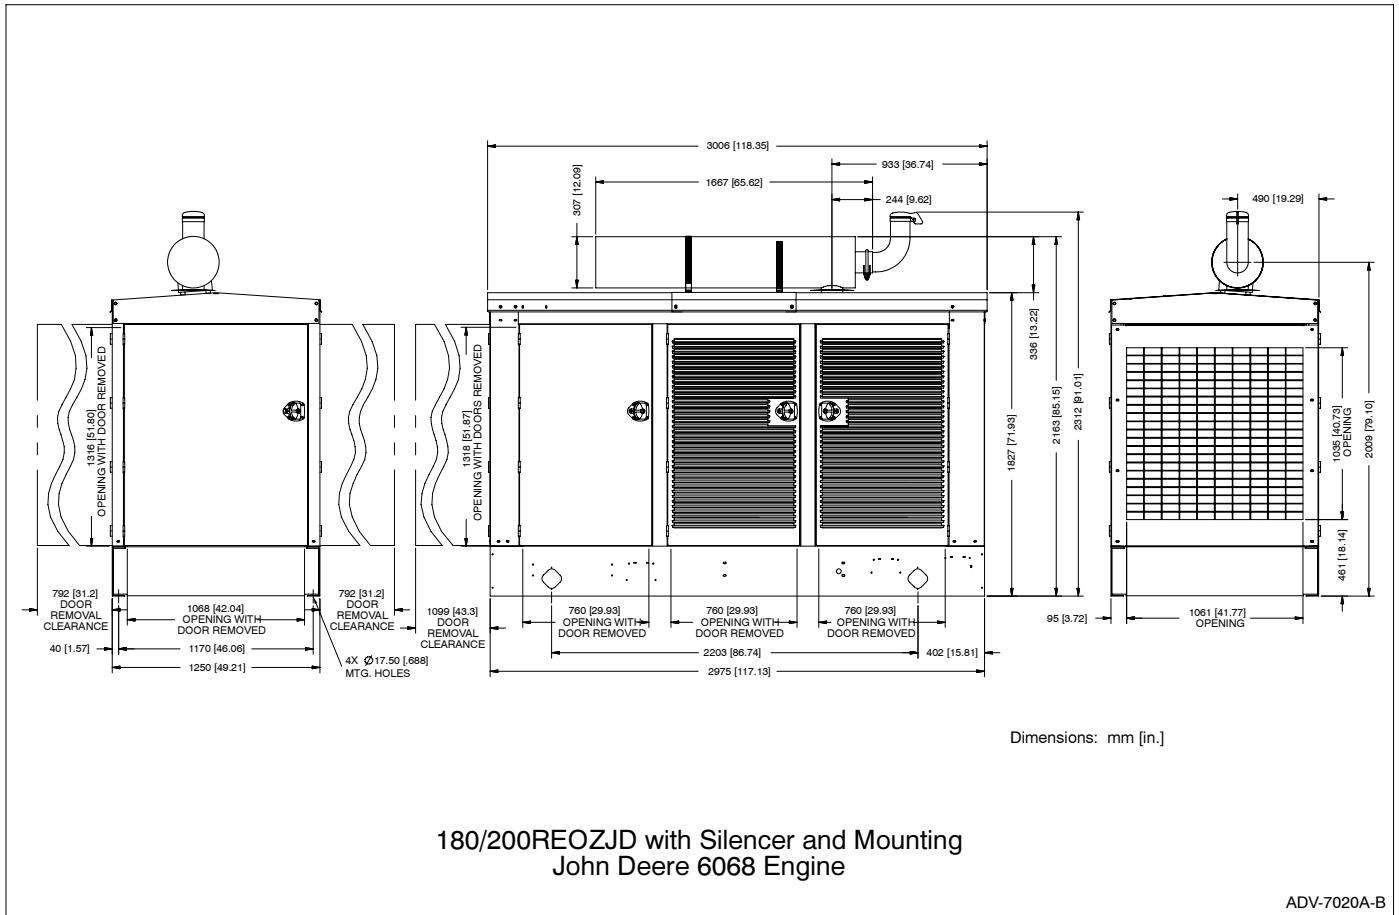

## Weather Housing Weights

kW	Alternator Model	Generator Set Weight (Wet) with Housing, kg (lb.)	Housing Only Weight, kg (lb.)
20REOZJB	All	857 (1890)	177 (390)
20REOZJB	All	862 (1900)	177 (390)
30REOZJB	4P5W, 4P5	873 (1925)	177 (390)
	4Q4W, 4Q4	857 (1890)	177 (390)
40REOZJB	All	934 (2060)	177 (390)
50REOZJB	4P8W, 4P8	1140 (2513)	191 (420)
	4Q10W, 4Q10	1183 (2608)	191 (420)
60REOZJB	4P10W, 4P10	1183 (2608)	191 (420)
	4S7W, 4V7W, 4S7, 4V7	1246 (2746)	191 (420)
80REOZJB	4S7W, 4S7	1246 (2746)	191 (420)
	4S9W, 4V9W, 4S9, 4V9	1315 (2900)	191 (420)
100REOZJB	4S9W, 4S9	1510 (3330)	304 (670)
	4V11W, 4V11	1619 (3570)	304 (670)
125REOZJB	4S11W, 4S11	1619 (3570)	304 (670)
	4S13W, 4S13	1642 (3620)	304 (670)
150REOZJB	4S13W, 4S13	1764 (3890)	336 (740)
	4S15W, 4S15	1833 (4040)	336 (740)
180REOZJB	All	2195 (4840)	336 (740)
200REOZJB	All	2486 (5480)	426 (940)
230REOZJB	All	2676 (5900)	426 (940)
80REOZJC	4S7W, 4S7	1348 (2971)	293 (645)
	4S9W, 4V9W, 4S9, 4V9	1417 (3125)	293 (645)
100REOZJC	4S9W, 4S9	1417 (3125)	293 (645)
	4S11W, 4V11W, 4S11, 4V11	1572 (3465)	293 (645)
135REOZJC	All	1764 (3890)	336 (740)
150REOZJC	4S13W, 4S13	1764 (3890)	336 (740)
	4S15W, 4S15	1833 (4040)	336 (740)
180REOZJC	All	2195 (4840)	336 (740)
200REOZJC	All	2313 (5100)	390 (860)
250REOZJC	4UA10	2604 (5740)	472 (1040)
	4UA13	2740 (6040)	472 (1040)
125REOZJD	All	1764 (3890)	336 (740)
150REOZJD	All	1764 (3890)	336 (740)
180REOZJD	All	2313 (5100)	390 (860)
200REOZJD	All	2313 (5100)	390 (860)
230REOZJD	4UA9	2740 (6040)	472 (1040)
	4UA13	2921 (6440)	472 (1040)
250REOZJD	4UA10	2785 (6140)	472 (1040)
	4UA13	2921 (6440)	472 (1040)
275REOZJD	4UA10	2785 (6140)	472 (1040)
	4UA13	2921 (6440)	472 (1040)

**DISTRIBUTED BY:**

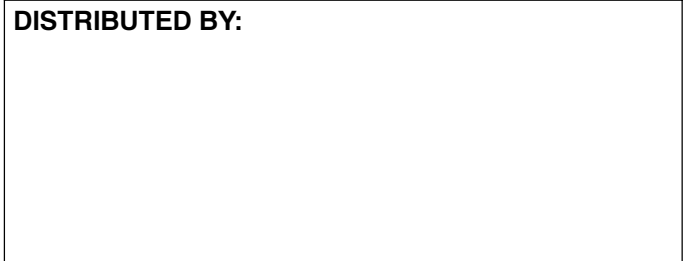

Availability is subject to change without notice. Kohler Co. reserves the right to change the design or specifications without notice and without any obligation or liability whatsoever. Contact your local Kohler® generator set distributor for availability.